



Illinois Tollway Base Sheet Revisions

Section M	Base Sheet Drawings		
	Drawing	Modification Summary	Effective: 03-01-2023
	Dynamic Message Sign (ITS)-Series 1100		
	M-ITS-1103	DMS FRONT ACCESS CANTILEVER ELECTRICAL PLAN	
		Moved the DMS Front Access Cantilever mounting structure to the right on the drawing so the edge of the DMS will be over the shoulder instead of been over the traffic lane	
	M-ITS-1104	DMS FRONT ACCESS BUTTERFLY ELECTRICAL PLAN ASSEMBLY	
		Move the DMS Front Access Butterfly mounting structure to the right on the drawing so the edge of the DMS sign will be over the shoulder instead of been over the traffic lane	

New Sheet

Retired Standard



NOTE TO DESIGNER



THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS **NOT** A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "*CADD STANDARDS MANUAL*" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.

1. FURNISH AND INSTALL LOCKABLE SERVICE DISCONNECT AT PROPOSED STRUCTURE.
2. 10KVA, 480V/120/240V SINGLE PHASE TRANSFORMER SHALL BE MOUNTED ABOVE DISCONNECT.
3. THIS IS A DIAGRAMMATIC SCHEMATIC, ALL BREAKERS, TRANSFORMER LOAD CENTER SHALL BE SIZED AND WIRED AS PER MANUFACTURER RECOMMENDATIONS.
4. NEUTRAL AND GROUNDING SHALL BE BONDED AT SERVICE ENTRANCE DISCONNECT.
5. ALL UNDERGROUND CONDUITS SHALL BE NON-METALLIC CNC AND ABOVE GRADE CONDUITS SHALL BE RGS PVC COATED. COUPLERS SHALL BE UTILIZED WHEN TRANSITIONING FROM CNC TO PRGS.
6. MOUNT CLAMPS ON 5'-0" ON CENTER MOUNTING. HARDWARE SHALL BE USED AS PER CONDUIT MANUFACTURER RECOMMENDATION.
7. CONTRACTOR SHALL SUPPLY AND INSTALL CABLE REDUCER LUGS WHERE SIZE OF CABLE ENTERING THE DISCONNECT IS MORE THAN RECOMMENDED SIZE DUE TO VOLTAGE DROP.
8. ALL ELECTRICAL WORK FOR DMS WALK-IN SHALL BE PAID UNDER PAY ITEM "JT132621 - DMS ELECTRICAL WORK - WALK-IN".
9. THIS SCHEMATIC IS FOR GUIDANCE ONLY. CONTRACTOR SHALL WIRE THE DMS CABINET AS PER MANUFACTURER RECOMMENDATIONS AND INDUSTRY STANDARDS.
10. THE COM (COMMON) CONTACT AND NC (NORMALLY CLOSED) CONTACT ON RELAY CONTACTS OF DIN RELAY SHALL FOLLOW THE TABLE ABOVE.
11. REFER TO ILLINOIS TOLLWAY STANDARD DRAWING F17 FOR OVERHEAD SIGN STRUCTURE SPAN TYPE (STEEL) STRUCTURE DETAILS.
12. FIBER PATCH PANEL IN DMS SIGN HOUSING SHALL BE A FACTORY TERMINATED UNIT WITH A 12-STRAND PIGTAIL CONNECTING TO RACK MOUNTED FIBER PATCH PANEL IN DMS CONTROLLER CABINET.




VERSION: 2022-03	STANDARD: M-ITS-1100	SHEET: 1 OF 1
---------------------	-------------------------	------------------


PLOT DRIVER: C:\mswcp\p-us-pw-02\as_brai_hoder\0161165\pdf-IT\Tollway\pfcg
PLOT DATE: 11/18/2022 2:59:35 AM
PLOT TIME: 2:59:35 AM
PLOT BY: bhodo
PLOT NAME: M-ITS-1101
PLOT NAME: P:\NCP\p-us-pw-02\Documents\Illinois Tollway\GEG (997688)\Standard Drawings and Base Sheets\Section - M-1100\TSM-ITS-1101.dgn

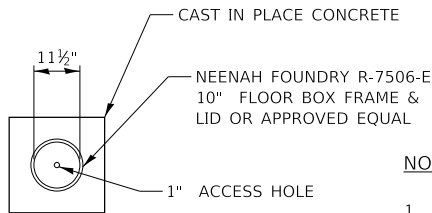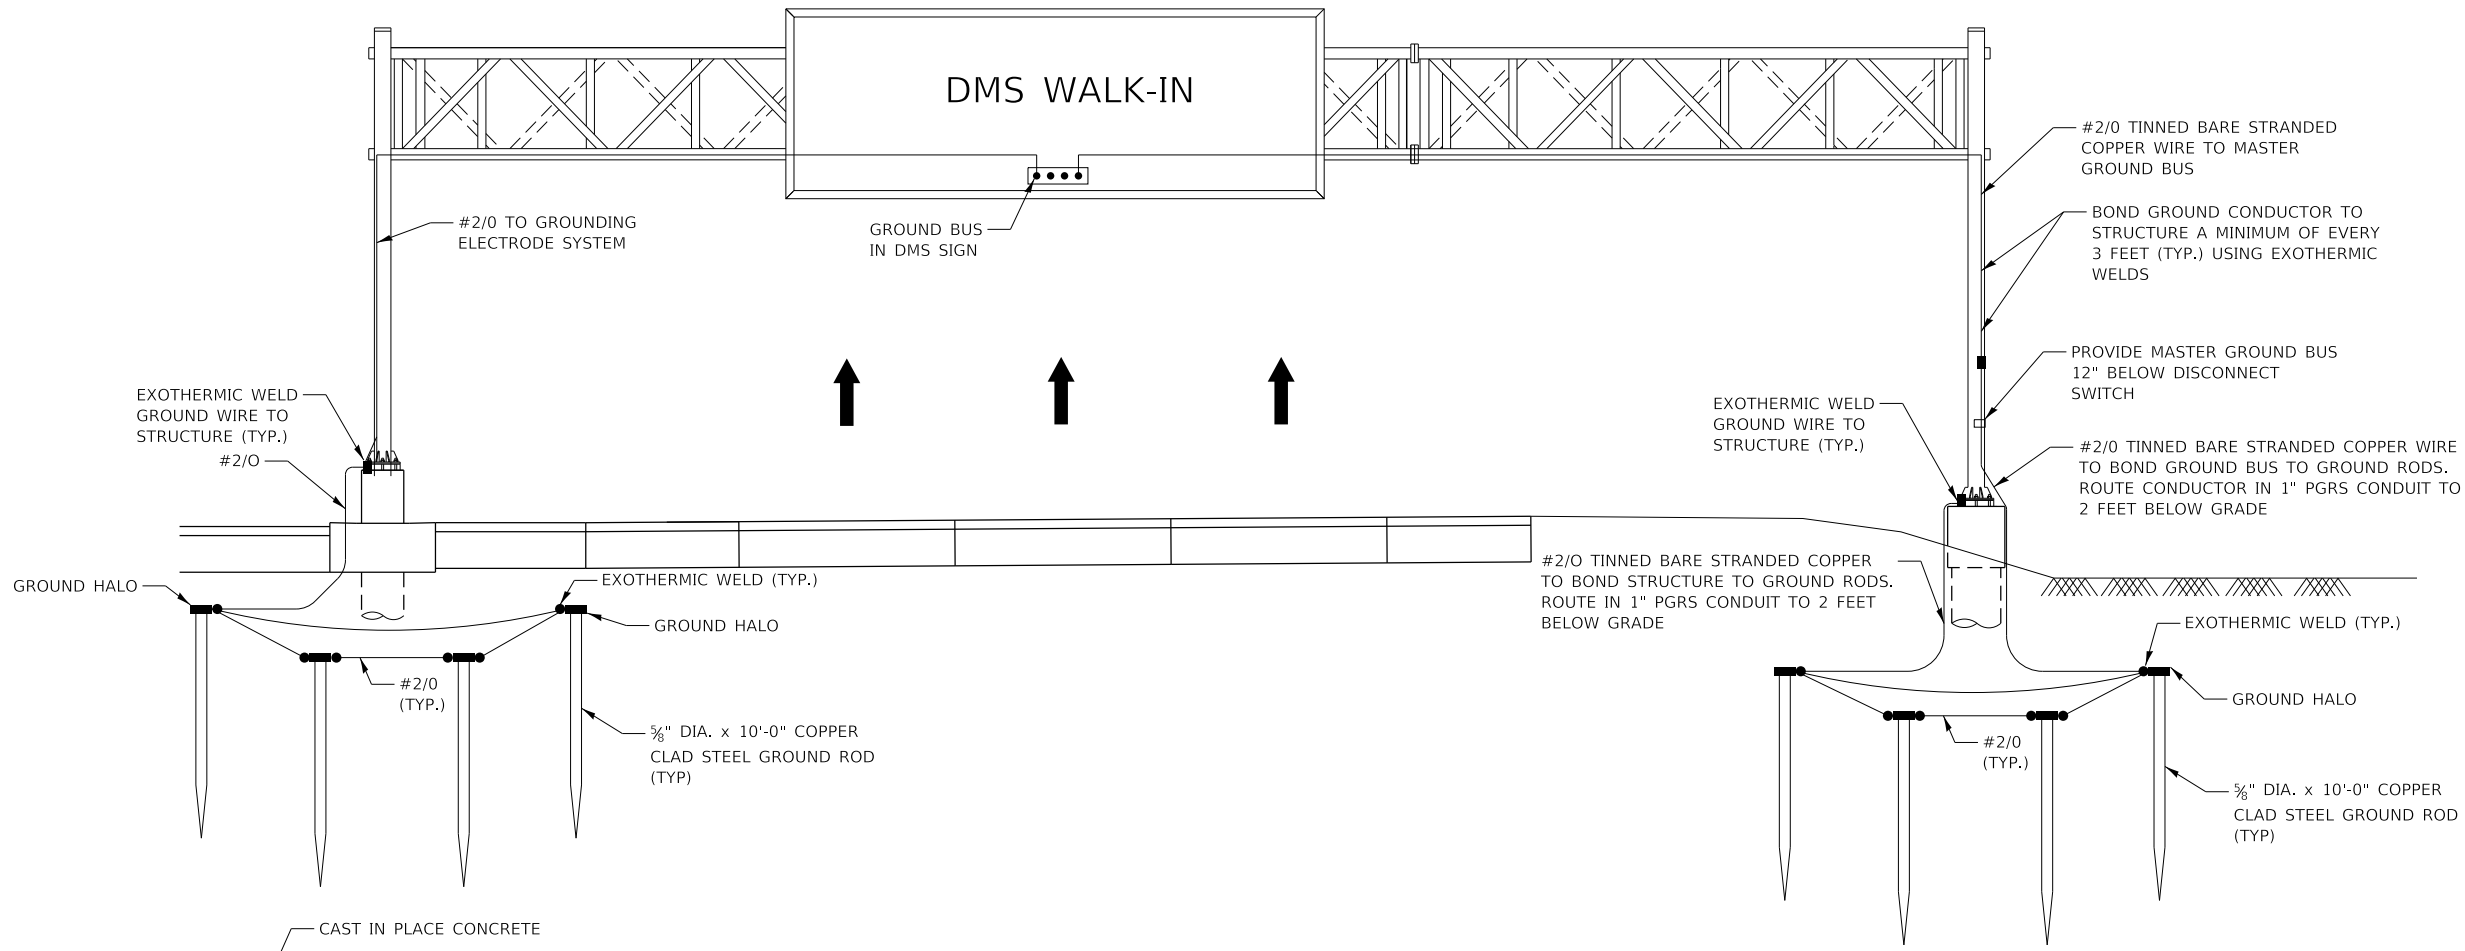

GROUND WELL PLAN DETAIL
(NOT TO SCALE, NOTE 3)

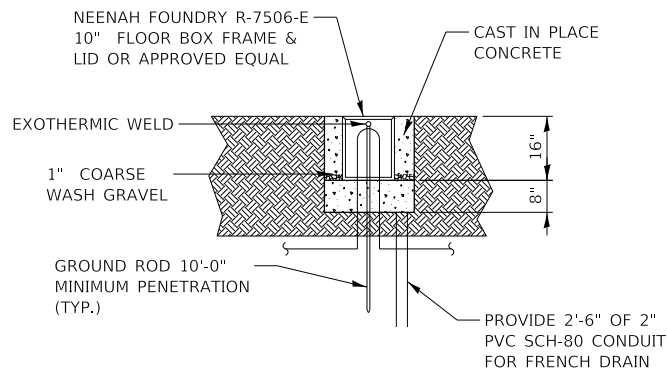


GROUND WELL ELEVATION DETAIL
(NOT TO SCALE, NOTE 3)

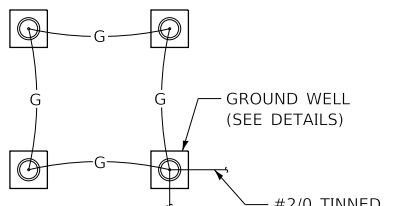


GROUND HALO DETAIL
(NOT TO SCALE)

NOTES:



- GROUNDING SYSTEM SHALL BE PLACED WITHIN ILLINOIS TOLLWAY RIGHT-OF-WAY.
- GROUND MOUNTED CONTROL CABINET SHALL BE PLACED UPSTREAM OF THE STRUCTURE AT THE LOCATION SHOWN ON THE PLAN VIEWS.
- INSTALL MARKER TAPE DIRECTLY ABOVE GROUNDING ELECTRODE CONDUCTORS.
- THE COST OF ALL MATERIALS, ALL GROUND BUSBARS, EXOTHERMIC WELDING, GROUND WELL, GROUND RODS AND ALL OTHER ITEMS TO COMPLETE THE GROUNDING ELECTRODE SYSTEM SHALL BE INCLUDED IN PAY ITEM JT132621 - DMS ELECTRICAL WORK - WALK-IN.
- REFER TO SHEET **M-ITS-1102** FOR DMS TYPICAL SITE WIRING DETAIL.
- GROUND RODS SHALL BE INSTALLED IN GROUND WELLS IN FINISHED GRADE UNLESS INSTALLED UNDER SHOULDERS OR PAVEMENT.

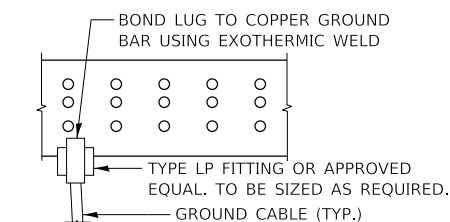

MASTER GROUND BUSBAR CONNECTION DETAIL
(NOT TO SCALE)

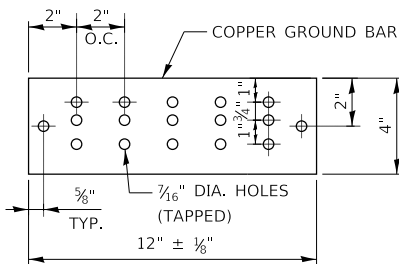

MASTER GROUND BUSBAR SUPPORT SPACING DETAIL
(NOT TO SCALE)

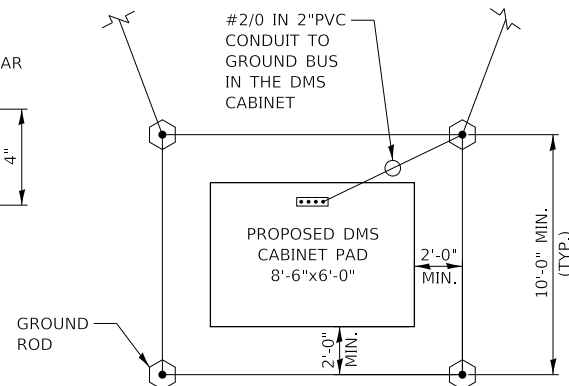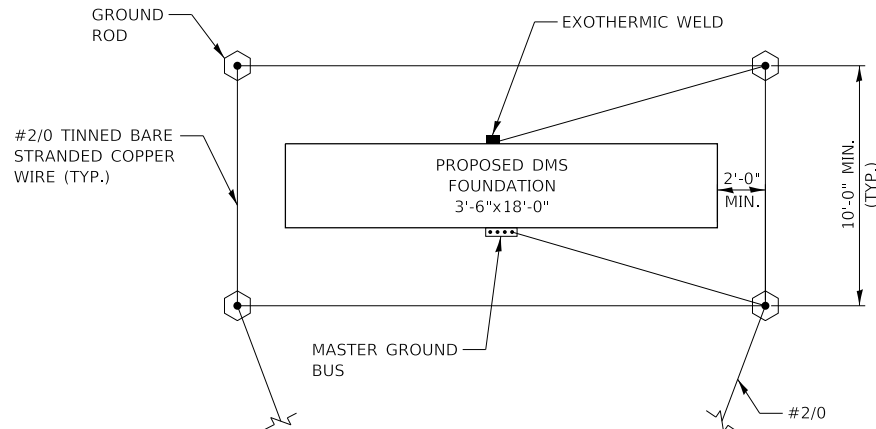

GROUNDING SCHEMATIC
(NOT TO SCALE)

NOTE TO DESIGNER


THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS **NOT** A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "CADD STANDARDS MANUAL" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.



DMS WALK-IN SITE
GROUNDING PLAN

PLOT DRIVER: c:\mswcp\p-us-pw-02\as_brad_hoder\0161165\pdf-11\tollway.plt
PLOT DATE: 11/18/2022 2:59:52 AM
PLOT TIME: 2:59:52 AM
PLOT BY: bhoda
PLOT NAME: M-ITS-1102
PLOT NAME: p:\work\p-us-pw-02\Documents\Illinois Tollway\GEG (997688)\Standard Drawings and Base Sheets\Section - M-1100 ITS\M-ITS-1102.dgn

PLOT SCALE: 0:2.000000"=1'-0" PAGE SIZE: 17x11 [in.]

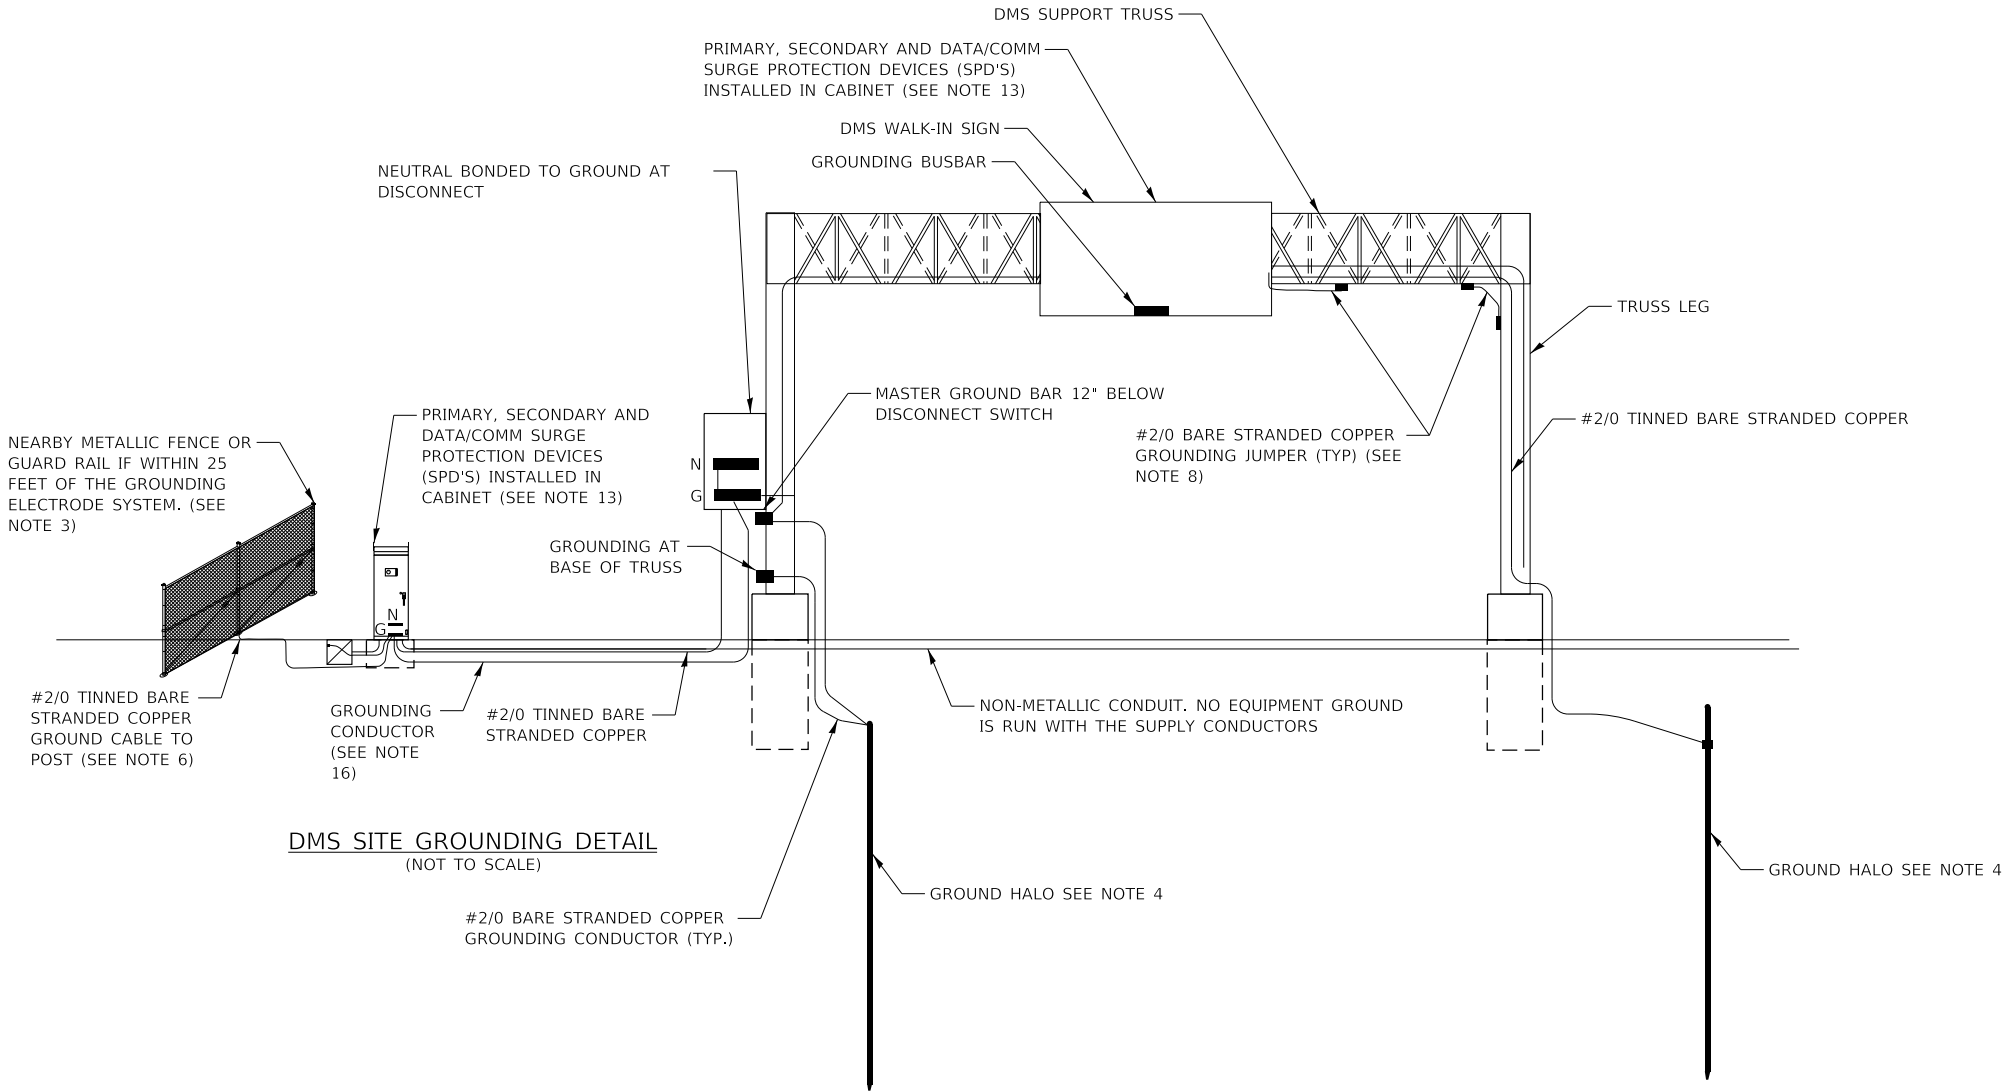

NOTES:

- ADDITIONAL GROUND RODS SHALL BE ADDED TO GROUNDING ELECTRODE CONDUCTOR AS REQUIRED UNTIL RESISTANCE TO GROUND IS 5 OHMS OR LESS. FOR DEVICE AND POWER SERVICE LOCATIONS. IF ADDITIONAL GROUND ROD ELECTRODES ARE REQUIRED IN ORDER TO ACHIEVE REQUIRED RESISTANCE THEY SHALL RADIATE OUT FROM EXISTING GROUND ROD ELECTRODES, THESE SHALL BE CONNECTED WITH #2/0 TINNED BARE STRANDED CONDUCTOR, AND SHALL BE 20' FROM CONNECTED GROUND ROD. ALL COMMUNICATION EQUIPMENT GROUNDING SITES SHALL BE TESTED FOR RESISTANCE TO GROUND USING THE THREE-POINT FALL-OF-POTENTIAL TEST PER ANSI/IEEE STD 81. SEE ITS ELEMENT SITE GROUNDING SPECIAL PROVISION FOR PROCEDURES.
- GROUND RODS SHALL NOT BE ROUTED THROUGH FOUNDATIONS.
- FENCES AND OTHER METALLIC STRUCTURES WITH PATHS TO GROUND SHALL BE CONNECTED TO EQUIPMENT GROUND IF THEY ARE LOCATED WITHIN 25' OF THE GROUNDING ELECTRODE SYSTEM OR ANY OBJECT GROUNDED TO THE GROUNDING ELECTRODE SYSTEM.
- GROUND RODS SHALL BE INSTALLED IN GROUND WELLS IN FINISHED GRADE UNLESS INSTALLED UNDER SHOULDERS OR PAVEMENT.
- ALL EQUIPMENT GROUNDS SHALL BE PROPERLY CONNECTED TO A CHASSIS: ALL PAINT AND OTHER COATINGS, INCLUDING GALVANIZATION, SHALL BE REMOVED PRIOR TO TERMINATION OF A GROUND, AFTER THE GROUND IS TERMINATED A NON-OXIDIZING COATING SHALL BE PAINTED OVER THE EXPOSED METAL SURFACES.
- GROUNDING ELECTRODE SYSTEM CONNECTIONS TO FENCING SHALL BE MADE USING HEAVY DUTY TINNED LISTED PIPE CLAMPS DESIGNED FOR GROUNDING AND STAINLESS STEEL HARDWARE.
- ALL GROUNDING DIAGRAMS ARE SCHEMATIC ONLY.
- ALL METALLIC MEMBERS OF THE DMS TRUSS AND THE DMS SIGN WITHIN 6 FEET OF EACH OTHER SHALL BE BONDED TOGETHER. WELDS SHALL BE CONSIDERED AN ACCEPTABLE BONDING METHOD. U-BOLT CONNECTIONS SHALL NOT BE CONSIDERED AN ACCEPTABLE BONDING METHOD.
- AT LEAST AN 8 INCH MINIMUM BENDING RADIUS SHALL BE MAINTAINED ON ALL GROUNDING ELECTRODE CONDUCTORS. THE ANGLE OF ANY BENDING SHALL NOT BE LESS THAN 90 DEGREE.
- GROUNDING CONDUCTORS SHALL ALWAYS ROUTE AS STRAIGHT AS POSSIBLE. "U" FORM JUMPERS SHALL BE ACCEPTABLE ONLY FOR GATES AND DOORS.
- THE QUANTITY OF GROUNDING ELECTRODE CONDUCTORS CONNECTED TO A GROUND ROD ELECTRODE SHALL BE LIMITED TO THREE.
- WHENEVER POSSIBLE, GROUND ROD ELECTRODES SHALL BE INSTALLED NO CLOSER THAN 11' FROM A FOUNDATION.
- EVERY COPPER CONDUCTOR OR CABLE ENTERING OR LEAVING A DMS ENCLOSURE, THE DMS CONTROLLER, OR THE CCTV ELECTRONICS ENCLOSURE SHALL BE PROTECTED, WITH A SURGE PROTECTION DEVICE.
- DIAGRAM OMITTS EQUIPMENT GROUNDING INSIDE ENCLOSURES.
- GROUNDING CONDUCTOR SHALL BE #2/0 TINNED BARE STRANDED COPPER. CONTRACTOR SHALL INSTALL GROUND RODS AS NECESSARY TO ENSURE GROUND RESISTANCE AT DMS CABINET IS 5 OHMS OR LESS.
- IF THERE IS A METAL HANDRAIL WITHIN 20 FEET OF CONTROL CABINET CONNECT HANDRAIL TO GROUNDING SYSTEM WITH #2/0 TINNED BARE STRANDED COPPER CONDUCTOR.


NOTE TO DESIGNER

THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS **NOT** A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "CADD STANDARDS MANUAL" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.



DMS WALK-IN TYPICAL SITE WIRING DETAIL

DMS CABINET - IP RELAY WIRING TABLE					
DESCRIPTION		CONNECTION FROM		CONNECTION TO	
IP TERMINAL	IP TERMINAL ASSIGNMENT	DEVICE	CONNECTION	DEVICE	CONNECTION
1	RESERVED FOR CCTV1				
2	RESERVED FOR CCTV2				
3	DMS LOAD SHEDDING RELAY	IP_RELAY	12VDC (+)	CB	CB1A
		CB	CB1B	IP_RELAY	3 COMM
		IP_RELAY	3 NC	LOAD SHED RELAY	COIL (+)
		SPLICE BLOCK	120 V	IP_RELAY	NC
4	DMS CONTROLLER	IP_RELAY	4 NC	POWER OUTLET #1 (COMMUNICATION)	HOT
5	RESERVED FOR FLASHING BEACONS				
6	OPEN				
7	OPEN				
8	OPEN				

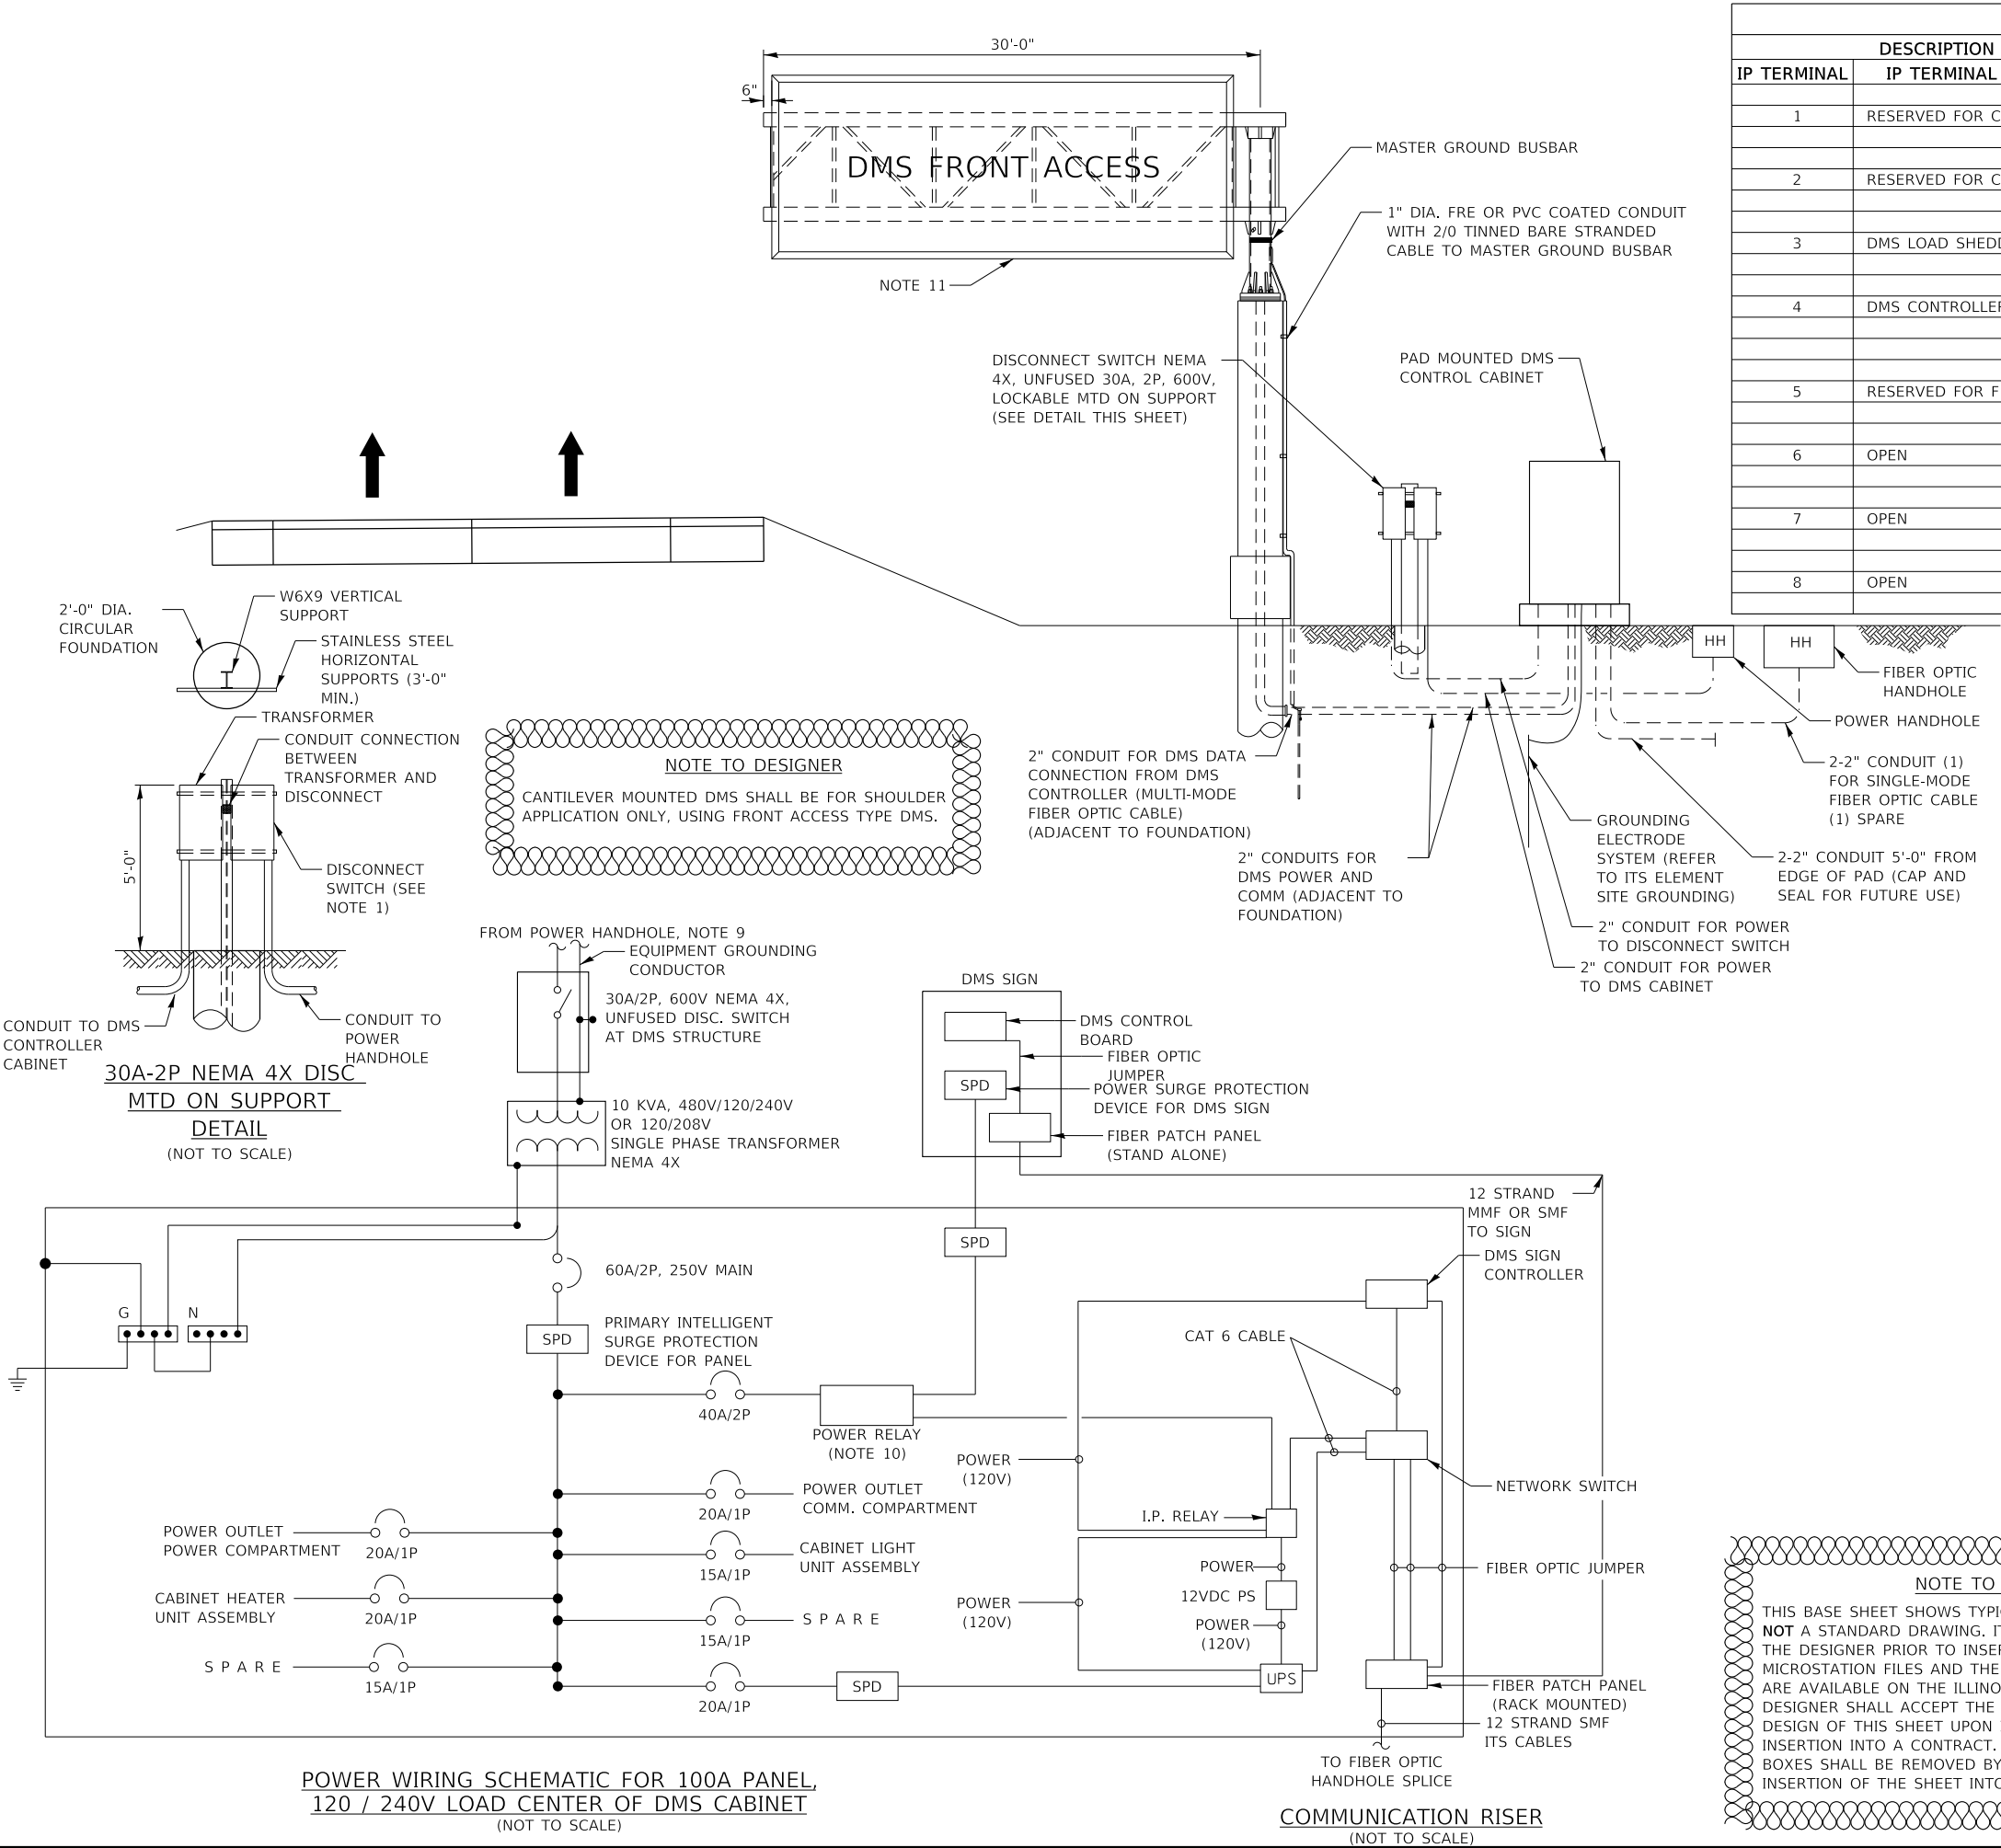

GENERAL NOTES:

- FURNISH AND INSTALL SERVICE DISCONNECT ON W6X9 SUPPORT.
- 10KVA, 480V/120/240V SINGLE PHASE TRANSFORMER.
- THIS IS A DIAGRAMMATIC SCHEMATIC. ALL BREAKERS, TRANSFORMER LOAD CENTER SHALL BE SIZED AND WIRED AS PER MANUFACTURER RECOMMENDATIONS.
- ENTIRE COMPLETED SYSTEM SHALL BE GROUNDED AND BONDED IN ACCORDANCE WITH MOTOROLA R56 MANUAL AND THE APPLICABLE ARTICLES OF SECTION 250 OF THE NATIONAL ELECTRICAL CODE.
- ALL UNDERGROUND CONDUITS SHALL BE NON-METALLIC CNC AND ABOVE GRADE CONDUITS SHALL BE RGS PVC COATED. COUPLERS SHALL BE USED WHEN TRANSITIONING FROM CNC TO PRGS.
- MOUNT CLAMPS ON 5'-0" ON CENTER MOUNTING. HARDWARE SHALL BE USED AS PER CONDUIT MANUFACTURER RECOMMENDATION.
- CONTRACTOR SHALL SUPPLY AND INSTALL CABLE REDUCER LUGS WHERE SIZE OF CABLE ENTERING THE DISCONNECT IS MORE THAN RECOMMENDED SIZE DUE TO VOLTAGE DROP.
- ALL ELECTRICAL WORK FOR DMS FRONT ACCESS SHALL BE PAID UNDER PAY ITEM JT132622 - DMS ELECTRICAL WORK - FRONT ACCESS.
- THIS SCHEMATIC IS FOR GUIDANCE ONLY. CONTRACTOR SHALL WIRE THE DMS CABINET AS PER MANUFACTURER RECOMMENDATIONS AND INDUSTRY STANDARDS.
- THE COM (COMMON) CONTACT AND NC (NORMALLY CLOSED) CONTACT ON RELAY CONTACTS OF DIN RELAY SHALL FOLLOW THE TABLE ABOVE.
- REFER TO ILLINOIS TOLLWAY STANDARD DRAWING F4 FOR OVERHEAD SIGN STRUCTURE CANTILEVER TYPE STRUCTURE DETAILS.
- PAD MOUNTED TRANSFORMER SHALL BE FURNISHED BY UTILITY COMPANY. FOUNDATION AND TRANSFORMER GROUNDING BY CONTRACTOR SHALL BE IN ACCORDANCE WITH UTILITY COMPANY REQUIREMENTS AND MUST BE TIED INTO DMS SITE GROUNDING ELECTRODE SYSTEM.
- FOR THE DISCONNECT SWITCH, HORIZONTAL SUPPORT SHALL BE SIZED TO ALLOW CONDUITS TO VERTICALLY DROP OUTSIDE OF THE FOUNDATION WITHOUT BENDS. FIBER PATCH PANEL IN DMS SIGN HOUSING SHALL BE A FACTORY TERMINATED UNIT WITH A 12-STRAND PIGTAIL CONNECTING TO RACK MOUNTED FIBER PATCH PANEL IN DMS CONTROLLER CABINET.
-


NOTE TO DESIGNER

THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS **NOT** A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "CADD STANDARDS MANUAL" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.



DMS FRONT ACCESS - CANTILEVER ELECTRICAL SCHEMATIC

PLOT DRIVER: c:\bms\wsp-pb-us-pw-02\as_brad_hoder\0161165\pdf-IT\Tollway.plt
PLOT DATE: 11/18/2025 11:04:44 AM
PLOT TIME: 3:00:32 AM
PLOT BY: bhodo
PLOT NAME: p:\02\wsp-us-pw-02\Documents\Illinois Tollway\GEG (997688)\Standard Drawings and Base Sheets\Base Sheets\Section - M\1100 ITS\M-ITS-1104.dgn

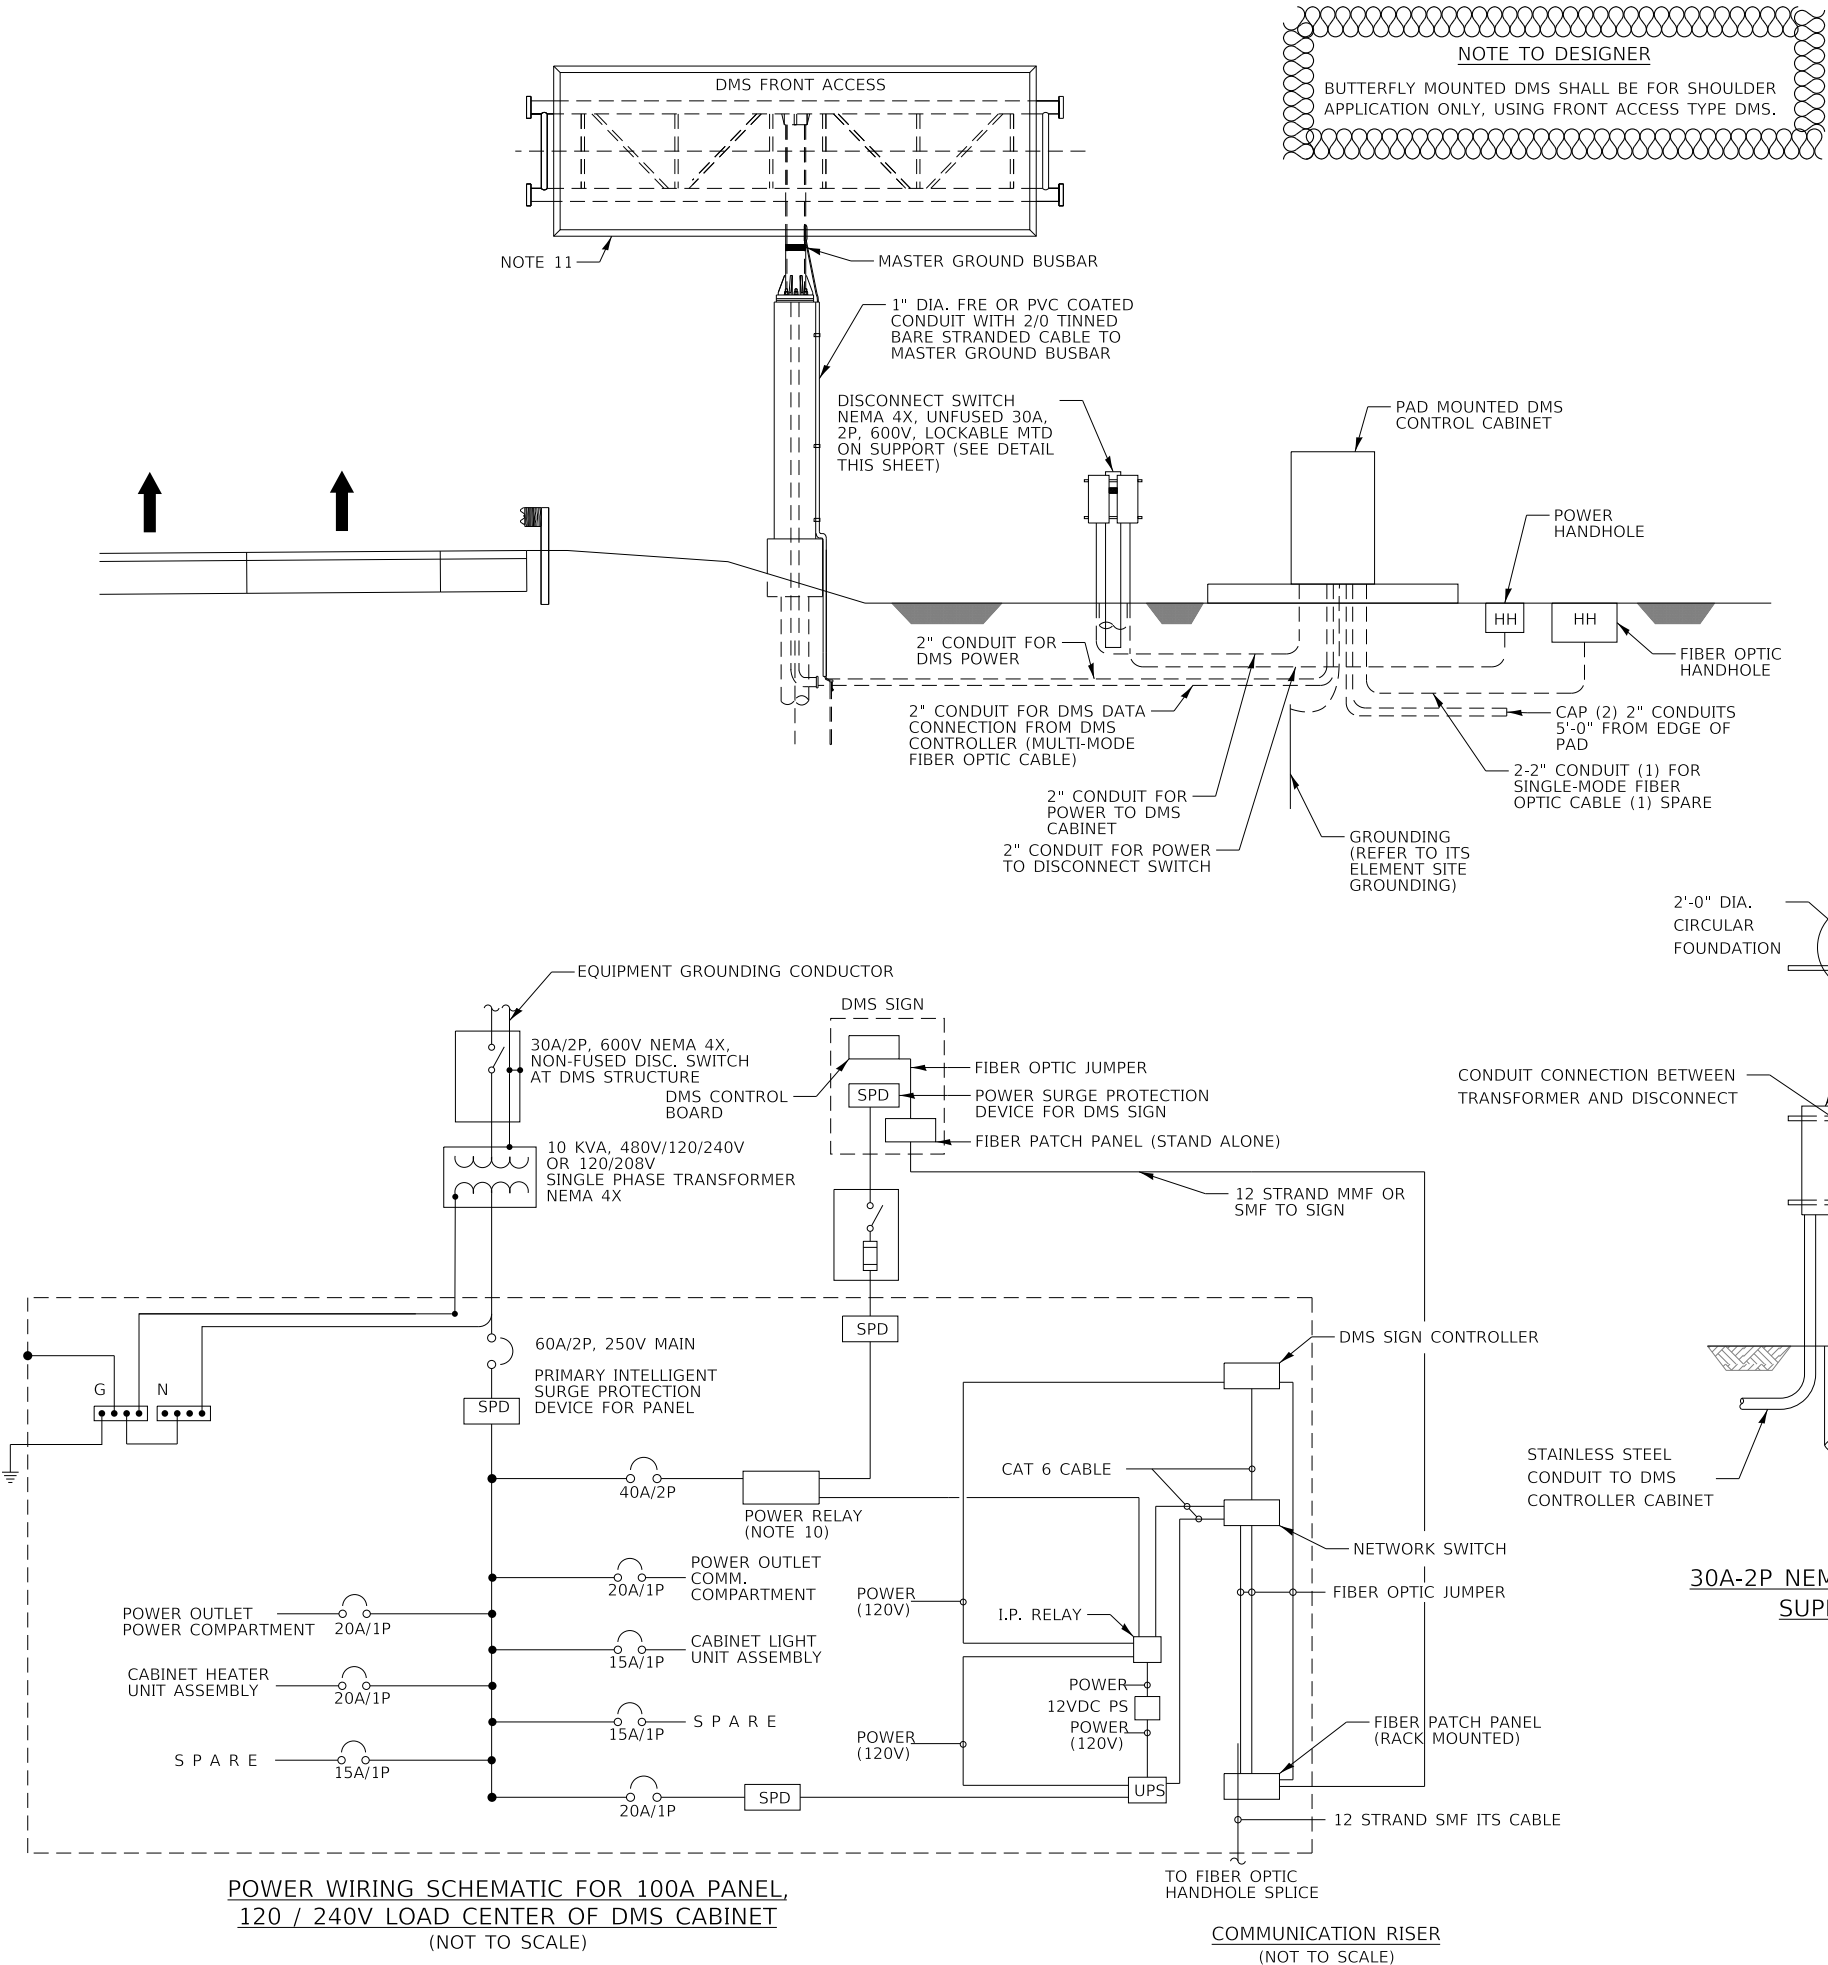

DMS CABINET - IP RELAY WIRING TABLE					
DESCRIPTION		CONNECTION FROM		CONNECTION TO	
IP TERMINAL	IP TERMINAL ASSIGNMENT	DEVICE	CONNECTION	DEVICE	CONNECTION
1	RESERVED FOR CCTV1				
2	RESERVED FOR CCTV2				
		IP_RELAY	12VDC (+)	CB	CB1A
3	DMS LOAD SHEDDING RELAY	CB	CB1B	IP_RELAY	3 COMM
		IP_RELAY	3 NC	LOAD SHED RELAY	COIL (+)
4	DMS CONTROLLER	SPLICE BLOCK	120 V	IP_RELAY	NC
		IP_RELAY	4 NC	POWER OUTLET #1 (COMMUNICATION)	HOT
5	RESERVED FOR FLASHING BEACONS				
6	OPEN				
7	OPEN				
8	OPEN				

NOTES:

- FURNISH AND INSTALL SERVICE DISCONNECT ON W6X9 SUPPORT.
- 10KVA, 480V/120/240V SINGLE PHASE TRANSFORMER.
- THIS IS A DIAGRAMMATIC SCHEMATIC, ALL BREAKERS, TRANSFORMER LOAD CENTER SHALL BE SIZED AND WIRED AS PER MANUFACTURER RECOMMENDATIONS.
- ENTIRE COMPLETED SYSTEM SHALL BE GROUNDED AND BONDED IN ACCORDANCE WITH ALL APPLICABLE SECTIONS OF NFPA 70 (NATIONAL ELECTRIC CODE) SECTION 250.
- ALL UNDERGROUND CONDUITS SHALL BE NON-METALLIC CNC AND ABOVE GRADE CONDUITS SHALL BE RGS PVC COATED. COUPLERS SHALL BE USED WHEN TRANSITIONING FROM CNC TO PRGS.
- MOUNT CLAMPS ON 5'-0" ON CENTER MOUNTING. HARDWARE SHALL BE USED AS PER CONDUIT MANUFACTURER RECOMMENDATION.
- CONTRACTOR SHALL SUPPLY AND INSTALL CABLE REDUCER LUGS WHERE SIZE OF CABLE ENTERING THE DISCONNECT IS MORE THAN RECOMMENDED SIZE DUE TO VOLTAGE DROP.
- ALL ELECTRICAL WORK FOR DMS TYPE 2 SHALL BE PAID UNDER PAY ITEM JT132622 - DMS ELECTRICAL WORK - FRONT ACCESS.
- THIS SCHEMATIC IS FOR GUIDANCE ONLY. CONTRACTOR SHALL WIRE THE DMS CABINET AS PER MANUFACTURER RECOMMENDATIONS AND INDUSTRY STANDARDS.
- THE COM (COMMON) CONTACT AND NC (NORMALLY CLOSED) CONTACT ON RELAY CONTACTS OF DIN RELAY SHALL FOLLOW THE TABLE ABOVE.
- REFER TO ILLINOIS TOLLWAY STANDARD DRAWING F14 FOR OVERHEAD SIGN STRUCTURE BUTTERFLY TYPE STRUCTURE DETAILS.
- FOR THE DISCONNECT SWITCH, HORIZONTAL SUPPORT SHALL BE SIZED TO ALLOW CONDUITS TO VERTICALLY DROP OUTSIDE OF THE FOUNDATION WITHOUT BENDS.
- FIBER PATCH PANEL IN DMS SIGN HOUSING SHALL BE A FACTORY TERMINATED UNIT WITH A 12-STRAND PIGTAIL CONNECTING TO RACK MOUNTED FIBER PATCH PANEL IN DMS CONTROLLER CABINET.




NOTE TO DESIGNER

THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS **NOT** A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "CADD STANDARDS MANUAL" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.



DMS FRONT ACCESS-BUTTERFLY ELECTRICAL SCHEMATIC


PLOT DRIVER: c:\bms\wsp-pb-us-pw-02\as_brad_hoder\0161165\pdf-IT\Tollway.plt
PLOT DATE: 11/08/2020
PLOT TIME: 3:00:51 AM
PLOT BY: bhodo
PLOT NAME: p:\wsp-pb-us-pw-02\Documents\Illinois Tollway\GEG (997688)\Standard Drawings and Base Sheets\Section - M-1100 ITS-M-1105.dgn

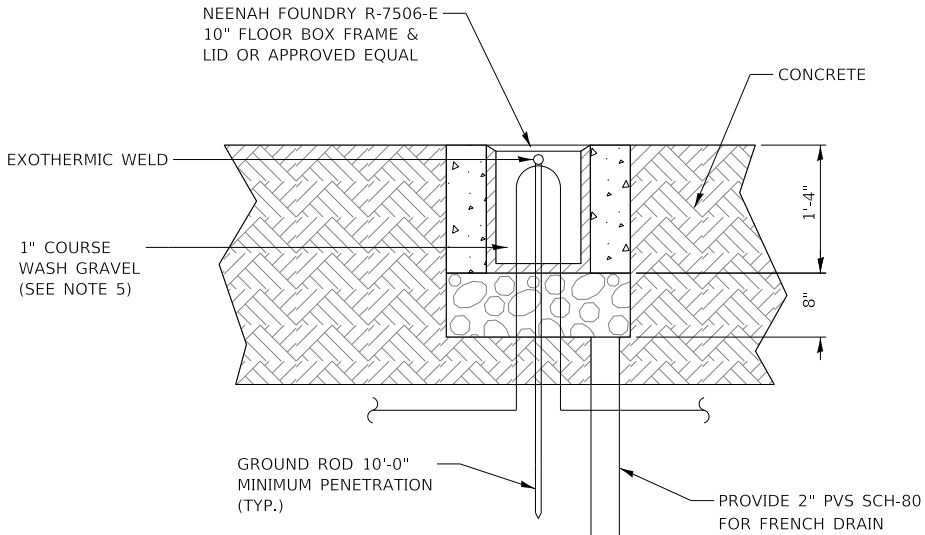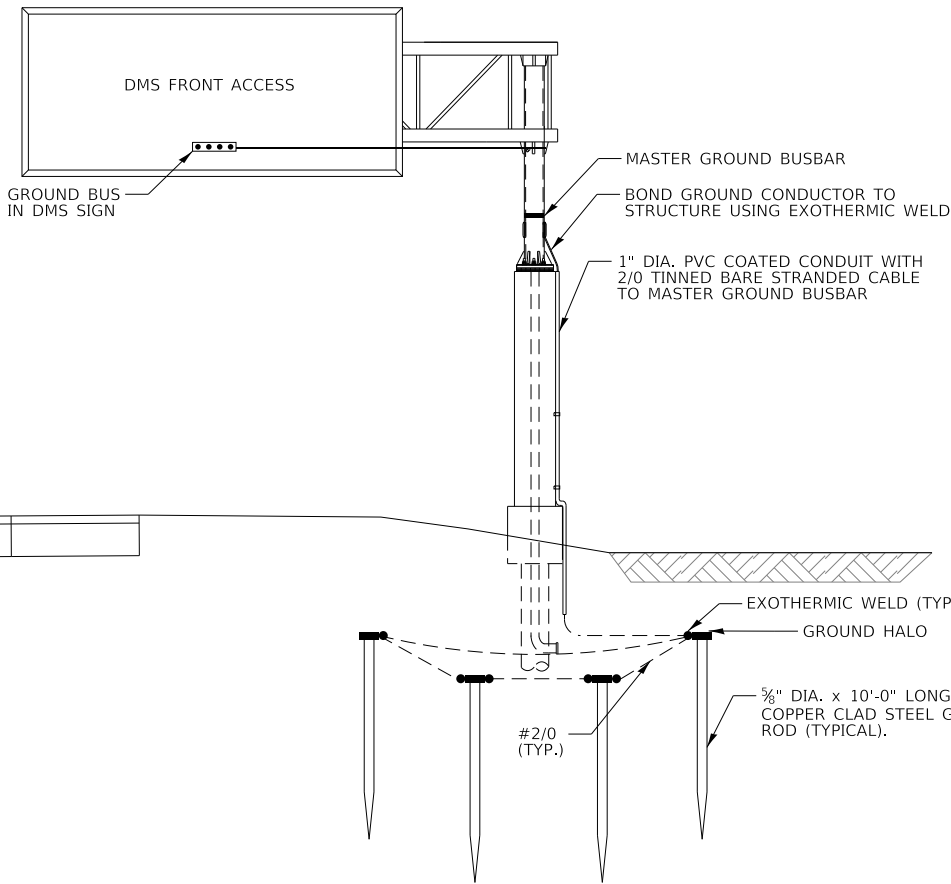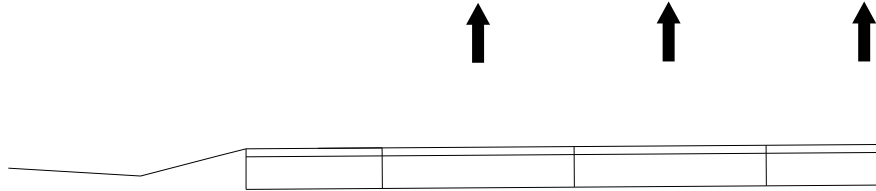


GROUND WELL ELEVATION DETAIL
N.T.S.

NOTES:


- GROUNDING SYSTEM SHALL BE PLACED WITHIN ILLINOIS TOLLWAY RIGHT-OF-WAY.
- GROUND MOUNTED CONTROL CABINET SHALL BE PLACED UP STREAM OF THE STRUCTURE AT THE LOCATION SHOWN ON THE PLAN VIEW.
- INSTALL MARKER TAPE DIRECTLY ABOVE GROUNDING ELECTRODES AND CONDUCTORS.
- THE COST OF ALL MATERIALS, ALL GROUND BUSBARS, EXOTHERMIC WELDING, GROUND WELL, OTHER ITEMS TO COMPLETE THE GROUNDING SYSTEMS SHALL BE INCLUDED IN PAY ITEM JT132622 - DMS ELECTRICAL WORK - FRONT ACCESS.
- CA-11, A QUALITY, IN ACCORDANCE WITH SSRBC 1004.

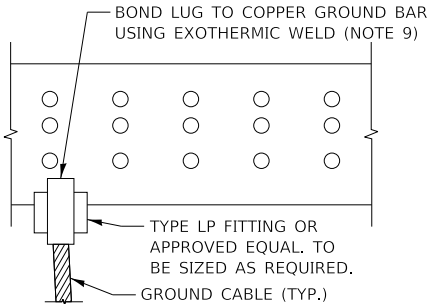


MASTER GROUND BUS BAR CONNECTION DETAIL
N.T.S.

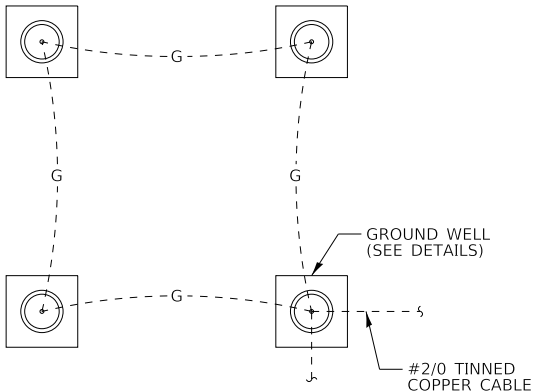


GROUND HALO DETAIL
N.T.S.

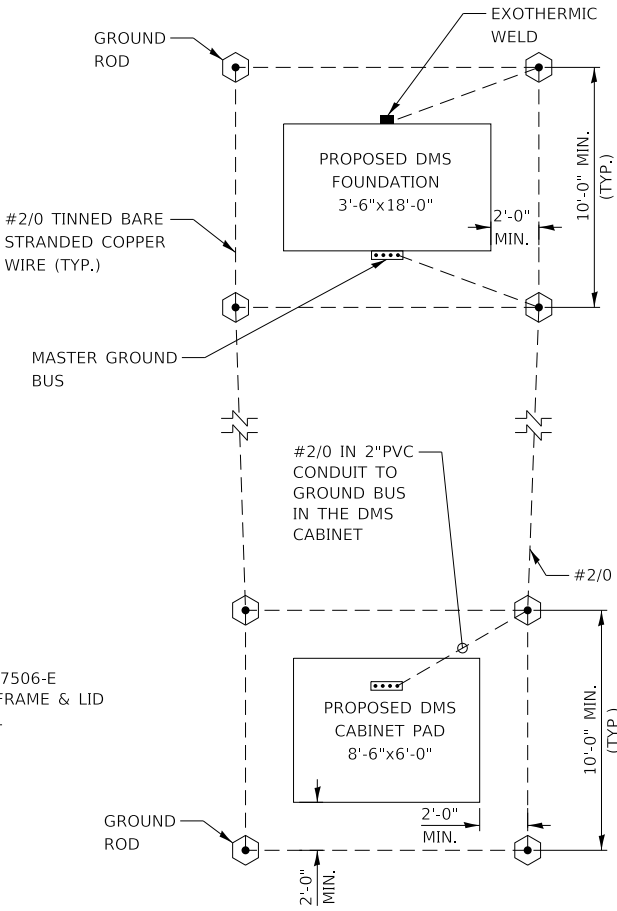

GROUNDING SCHEMATIC
N.T.S.

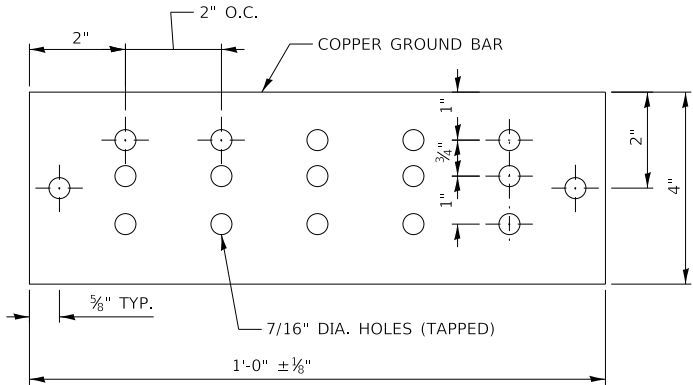

MASTER GROUND BUS BAR SUPPORT SPACING DETAIL
N.T.S.

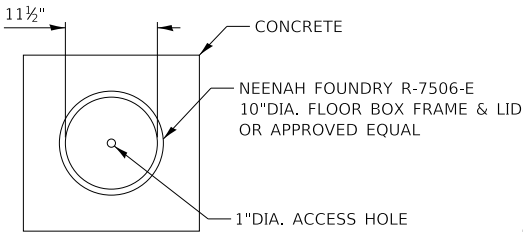

GROUND WELL PLAN DETAIL
N.T.S.

NOTE TO DESIGNER

THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS **NOT** A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "CADD STANDARDS MANUAL" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.


NOTE TO DESIGNER

THIS TYPICAL DMS FRONT ACCESS GROUNDING PLAN IS APPLICABLE TO BOTH DMS FRONT ACCESS CANTILEVER AND BUTTERFLY SIGNS. DMS FRONT ACCESS CANTILEVER SIGN IS SHOWN ON THIS DRAWING FOR CLARITY. DESIGNER SHALL MODIFY AND COMPLETE THIS DRAWING FOR DMS FRONT ACCESS BUTTERFLY SIGN.



DMS FRONT ACCESS SITE GROUNDING PLAN

PLOT DRIVER: c:\bms\wsp-pb-us-pw-02\ba_brad_hoder\0161165\pdf-1\Tollway.plt
PLOT DATE: 11/18/2022 3:01:06 PM
PLOT TIME: 3:01:06 AM
PLOT BY: bhodo
PLOT NAME: M-ITS-1106
PLOT NAME: P:\V\wsp-us-pw-02\Documents\Illinois Tollway GEG (997688)\Standard Drawings and Base Sheets\Base Sheets\Section - M-1100 ITS\M-ITS-1106.dgn

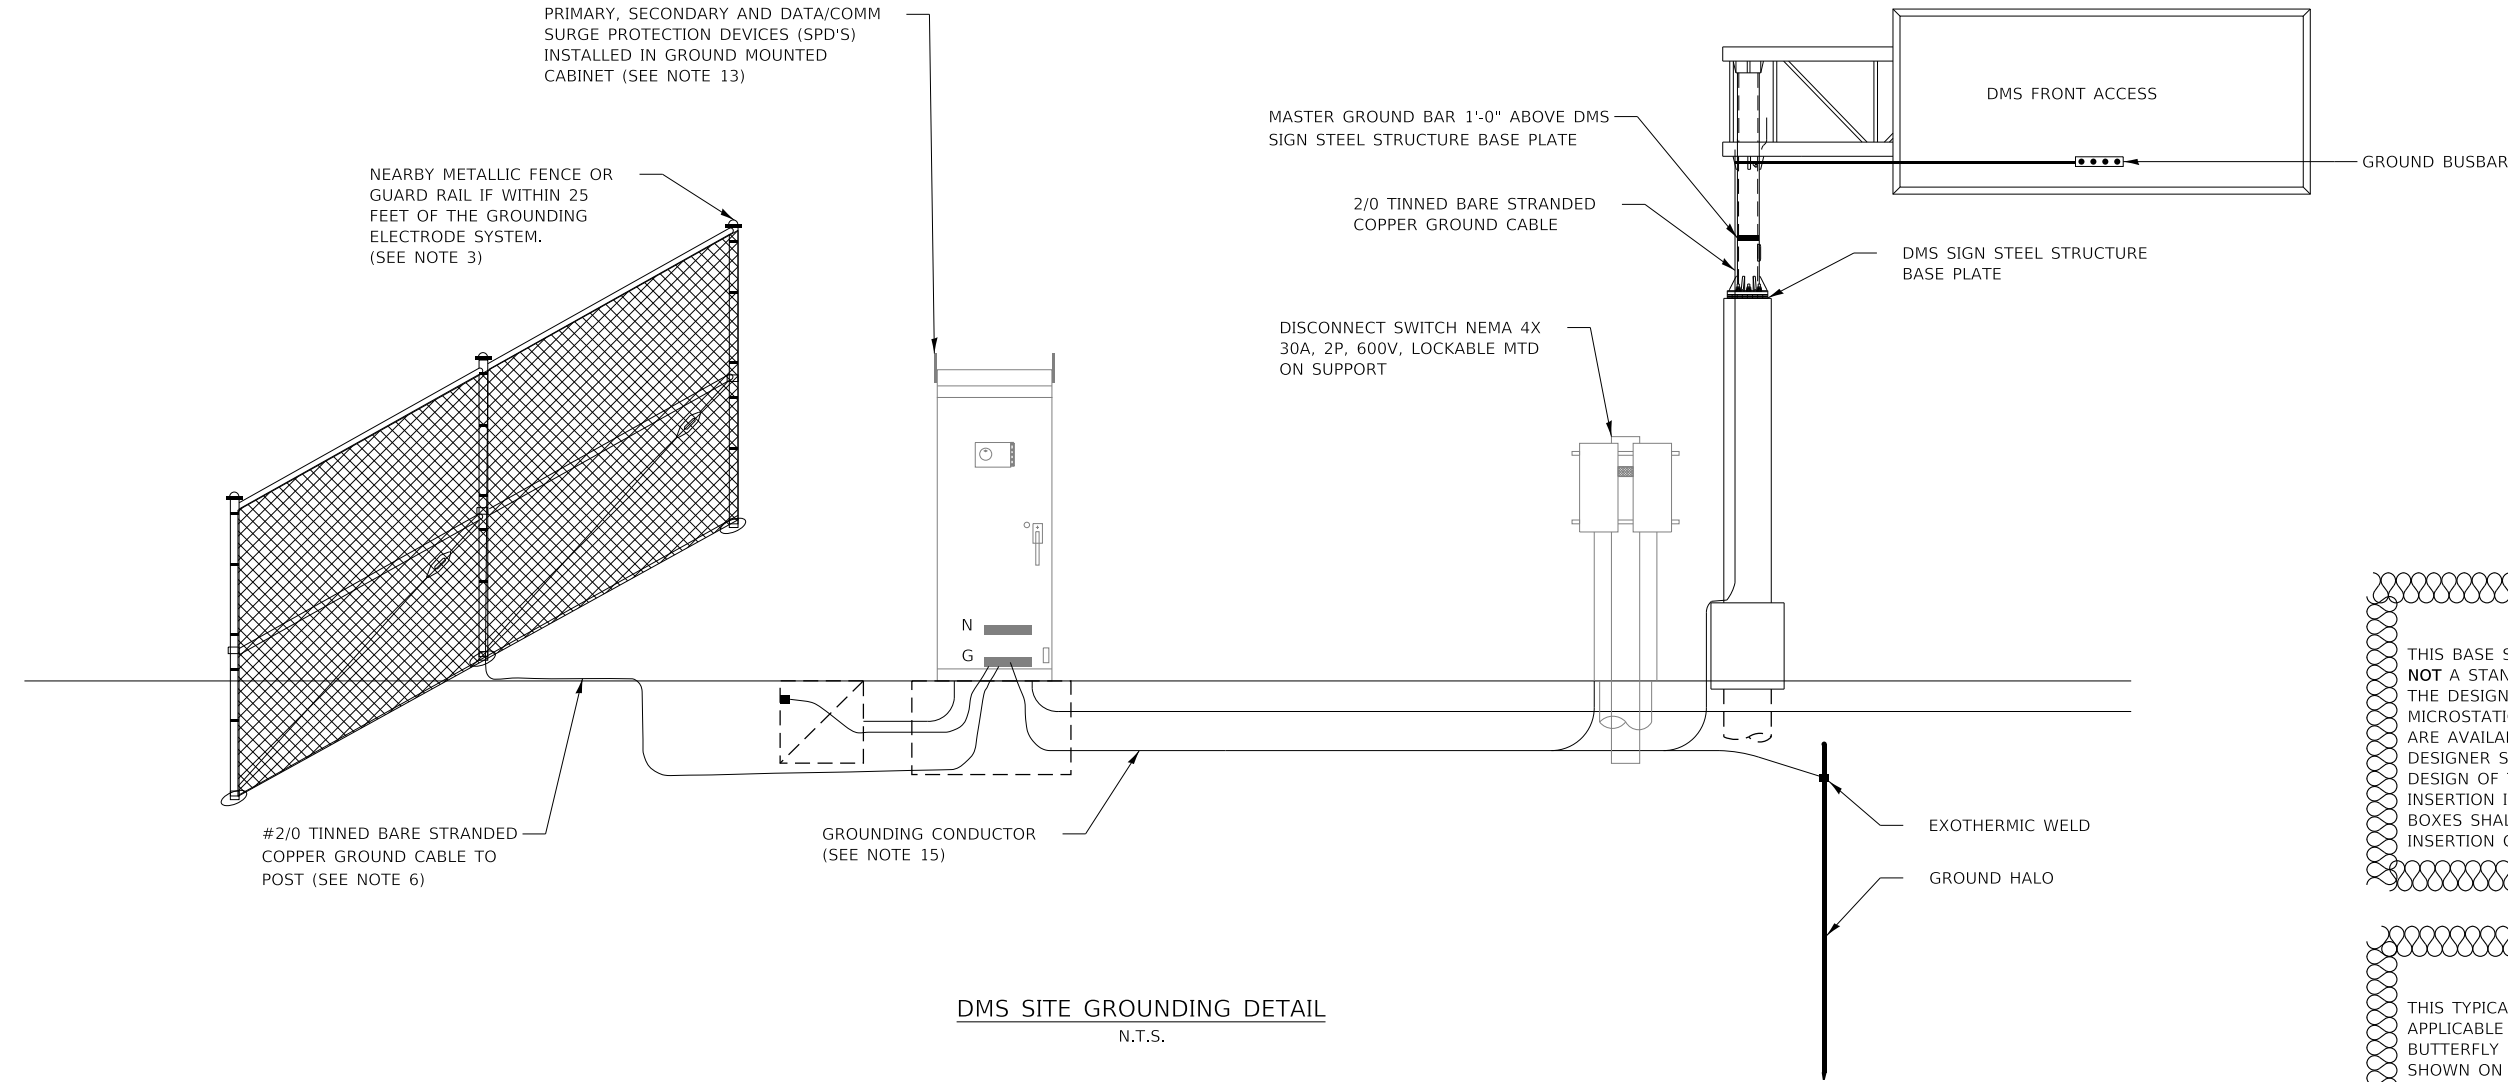

DMS SITE GROUNDING DETAIL
N.T.S.

NOTE TO DESIGNER

THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS **NOT** A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "CADD STANDARDS MANUAL" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.

NOTE TO DESIGNER


THIS TYPICAL DMS FRONT ACCESS GROUNDING PLAN IS APPLICABLE TO BOTH DMS FRONT ACCESS CANTILEVER AND BUTTERFLY SIGNS. DMS FRONT ACCESS CANTILEVER SIGN IS SHOWN ON THIS DRAWING. FOR CLARITY, DESIGNER SHALL MODIFY AND COMPLETE THIS DRAWING FOR DMS FRONT ACCESS BUTTERFLY SIGN.

NOTES:


- ADDITIONAL GROUND RODS SHALL BE ADDED TO GROUNDING ELECTRODE CONDUCTOR AS REQUIRED UNTIL RESISTANCE TO GROUND IS 5 OHMS OR LESS. FOR DEVICE AND POWER SERVICE LOCATIONS. IF ADDITIONAL GROUND ROD ELECTRODES ARE REQUIRED IN ORDER TO ACHIEVE REQUIRED RESISTANCE THEY SHALL RADIATE OUT FROM EXISTING GROUND ROD ELECTRODES, THESE SHALL BE CONNECTED WITH #2/0 TINNED BARE STRANDED CONDUCTOR, AND SHALL BE 20' FROM CONNECTED GROUND ROD. ALL COMMUNICATION EQUIPMENT GROUNDING SITES SHALL BE TESTED FOR RESISTANCE TO GROUND USING THE THREE-POINT FALL-OF-POTENTIAL TEST PER ANSI/IEEE STD 81. SEE ITS ELEMENT SITE GROUNDING SPECIAL PROVISIONS FOR PROCEDURES.
- GROUND RODS SHALL NOT BE ROUTED THROUGH FOUNDATIONS.
- FENCES AND OTHER METALLIC STRUCTURES WITH PATHS TO GROUND SHALL BE CONNECTED TO EQUIPMENT GROUND IF THEY ARE LOCATED WITHIN 25' OF THE GROUNDING ELECTRODE SYSTEM OR ANY OBJECT GROUNDED TO THE GROUNDING ELECTRODE SYSTEM.
- GROUND RODS SHALL BE INSTALLED IN GROUND WELLS IN FINISHED GRADE.
- ALL EQUIPMENT GROUNDS SHALL BE PROPERLY CONNECTED TO A CHASSIS; ALL PAINT AND OTHER COATINGS, INCLUDING GALVANIZATION, SHALL BE REMOVED PRIOR TO TERMINATION OF A GROUND, AFTER THE GROUND IS TERMINATED A NON-OXIDIZING COATING SHALL BE PAINTED OVER THE EXPOSED METAL SURFACES.
- GROUNDING ELECTRODE SYSTEM CONNECTIONS TO FENCING SHALL BE MADE USING HEAVY DUTY TINNED LISTED PIPE CLAMPS DESIGNED FOR GROUNDING AND STAINLESS STEEL HARDWARE.
- ALL GROUNDING DIAGRAMS ARE SCHEMATIC ONLY.
- ALL METALLIC MEMBERS OF THE DMS TRUSS AND THE DMS SIGN WITHIN 6 FEET OF EACH OTHER SHALL BE BONDED TOGETHER. WELDS SHALL BE CONSIDERED AN ACCEPTABLE BONDING METHOD. U-BOLT CONNECTIONS SHALL NOT BE CONSIDERED AN ACCEPTABLE BONDING METHOD.
- AT LEAST AN 8 INCH MINIMUM BENDING RADIUS SHALL BE MAINTAINED ON ALL GROUNDING ELECTRODE CONDUCTORS. THE ANGLE OF ANY BENDING SHALL NOT BE LESS THAN 90 DEGREES.
- GROUNDING CONDUCTORS SHALL ALWAYS ROUTE AS STRAIGHT AS POSSIBLE. "U" FORM JUMPERS SHALL BE ACCEPTABLE ONLY FOR GATES AND DOORS.
- THE QUANTITY OF GROUNDING ELECTRODE CONDUCTORS CONNECTED TO A GROUND ROD ELECTRODE SHALL BE LIMITED TO THREE.
- WHENEVER POSSIBLE, GROUND ROD ELECTRODES SHALL BE INSTALLED NO CLOSER THAN 11' FROM A FOUNDATION.
- EVERY COPPER CONDUCTOR OR CABLE ENTERING OR LEAVING A DMS ENCLOSURE, THE DMS CONTROLLER, OR THE CCTV ELECTRONICS ENCLOSURE SHALL BE PROTECTED WITH A SURGE PROTECTION DEVICE.
- DIAGRAM OMITS EQUIPMENT GROUNDING INSIDE ENCLOSURES.
- GROUNDING CONDUCTOR SHALL BE #2/0 TINNED BARE STRANDED COPPER. CONTRACTOR SHALL INSTALL GROUND RODS AS NECESSARY TO ENSURE GROUND RESISTANCE AT DMS CABINET IS 5 OHMS OR LESS.
- IF THERE IS A METAL HANDRAIL WITHIN 20 FEET OF CONTROL CABINET CONNECT HANDRAIL TO GROUNDING SYSTEM WITH #2/0 TINNED BARE STRANDED COPPER CONDUCTOR.




DMS FRONT ACCESS SITE
WIRING DETAIL

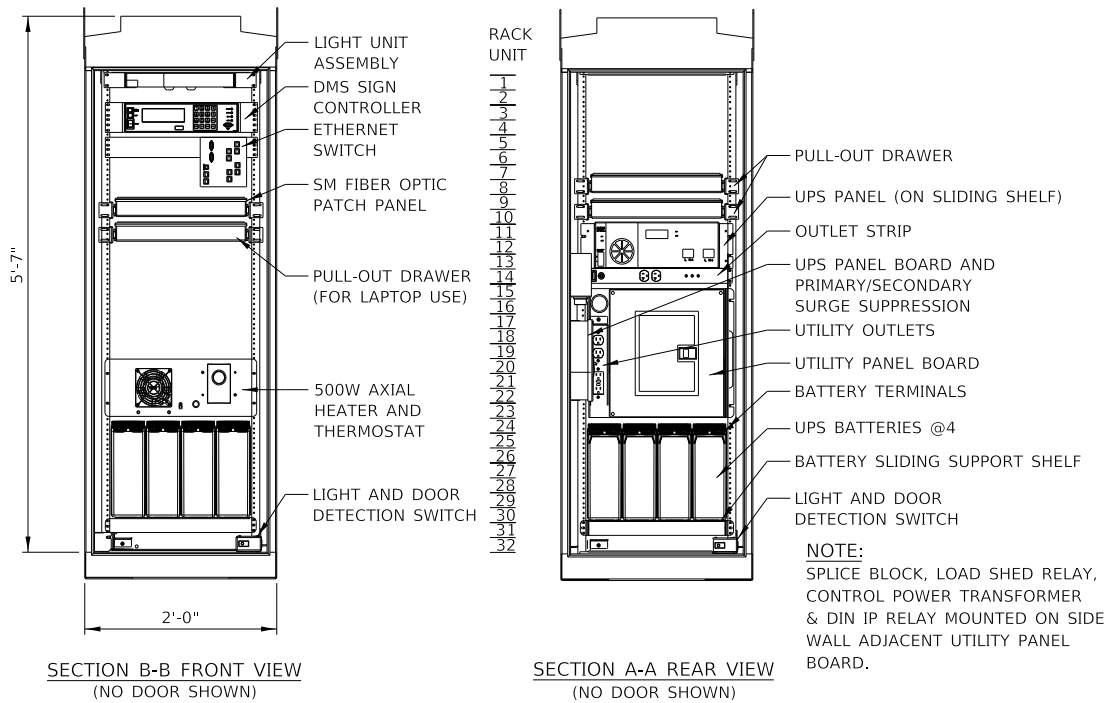

TYPE 334 DMS CABINET LAYOUT DETAILS

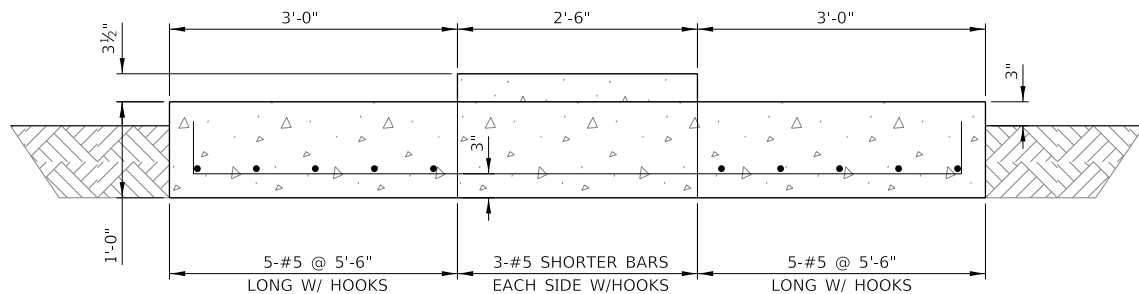


SECTION E-E

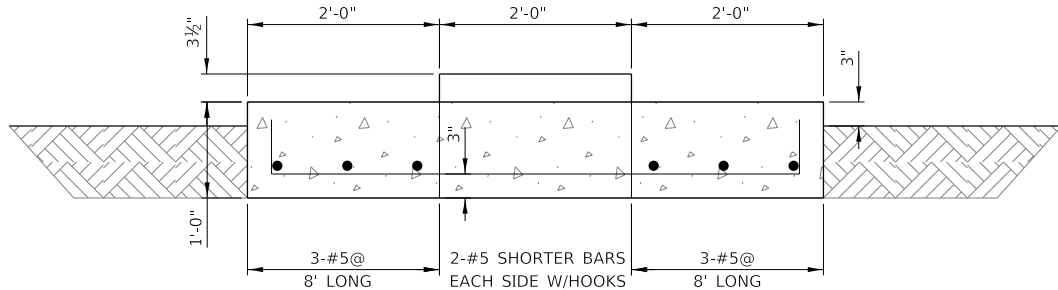

SECTION D-D

NOT TO SCALE


DMS CONTROLLER FOUNDATION DETAILS

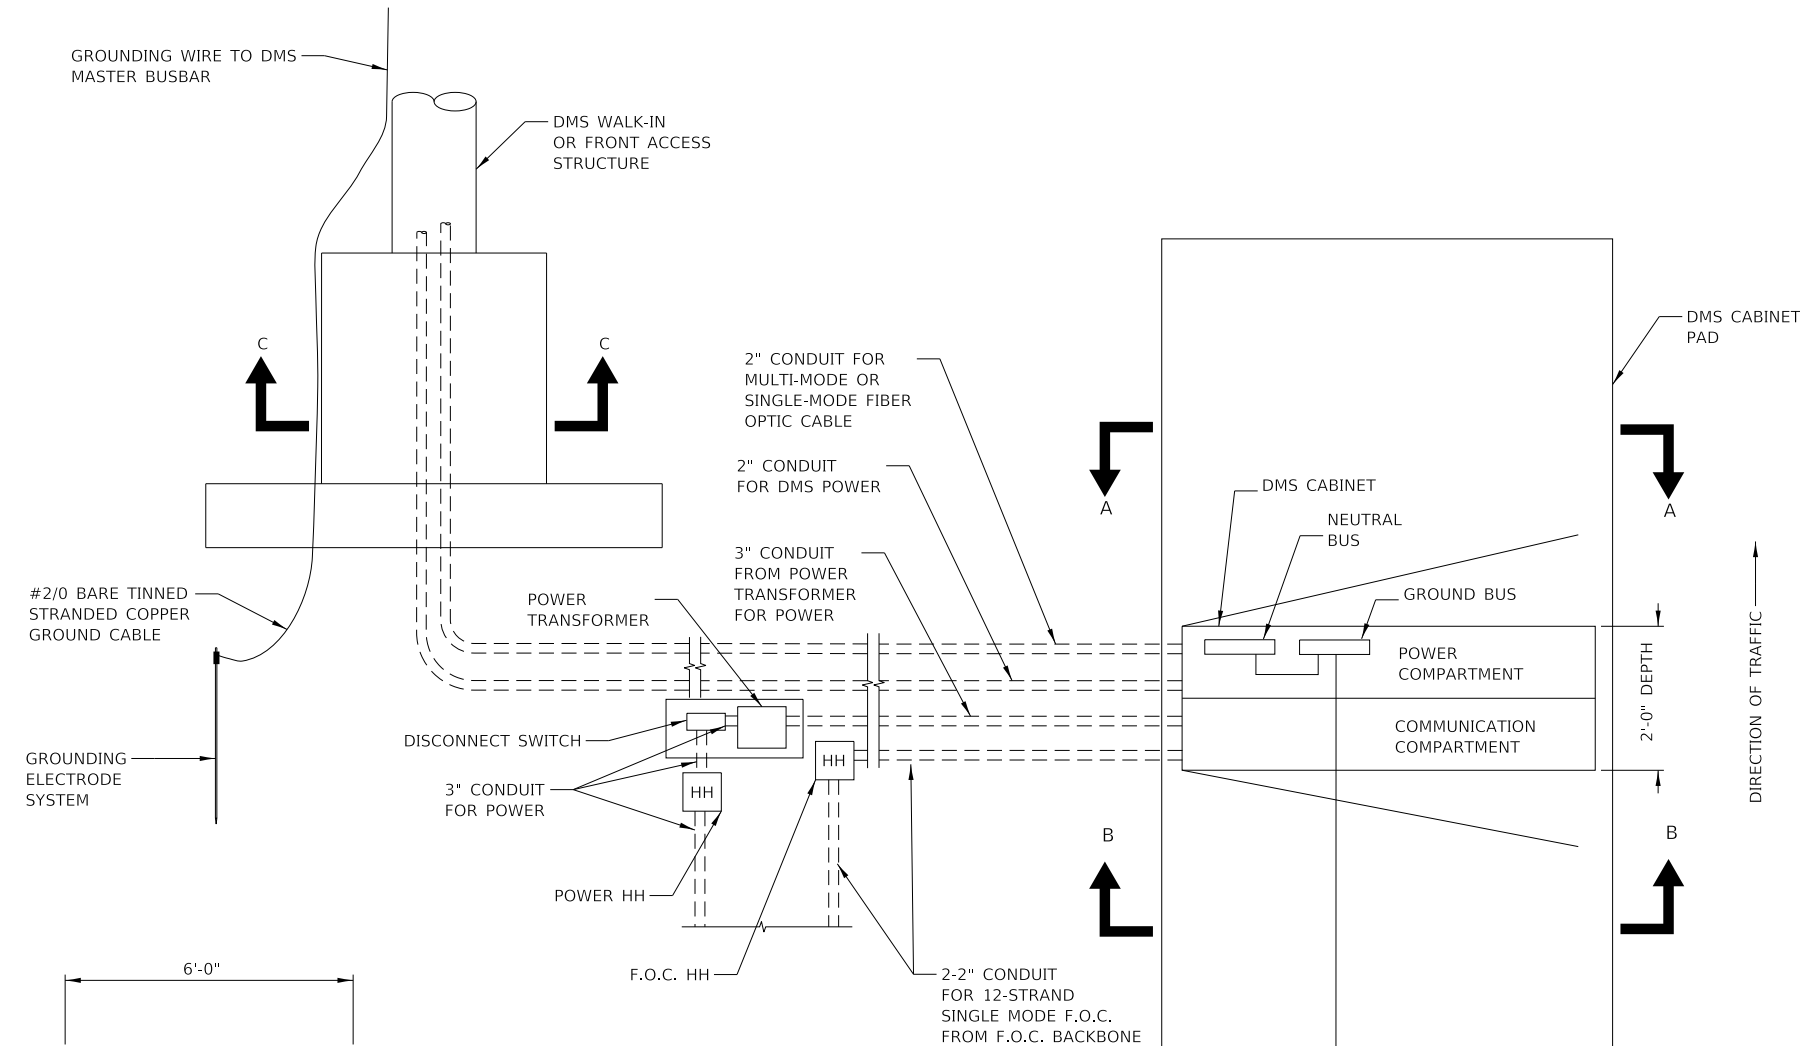

PLAN/ELEVATION

DMS CABINET NOTES:

- PAD MOUNT CONFIGURATION
- 0.125" ALUMINUM 5052-H34 CONSTRUCTION WITH CONTINUOUSLY WELDED EXTERNAL SEAMS
- THREE POINT LATCH WITH SST HANDLE
- DOUBLE FLANGED DOOR SEAL WITH 1#2" X 2" CLOSED CELL NEOPRENE GASKET WITH CORBIN #2 LOCK ON EACH DOOR.
- FULL LENGTH EIA GAGE FOR 19" EQUIPMENT
- ADJUSTABLE PULL OUT DRAWER
- DOOR OPENING: 21.50" X 54.75"
- FULL LENGTH STAINLESS STEEL HINGE
- ALL STAINLESS STEEL HARDWARE
- CORBIN #2 LOCK
- NEMA 4X ENCLOSURE
- SHIPPED ON WOOD PALLET
- MOUNT LAYER 2 ETHERNET SWITCH (DIN-RAIL MOUNT) USING DIN-RAIL MOUNT
- BATTERIES AND UPS SHALL BE PLACED ON A SLIDING SHELF
- CABINET DIMENSION 24"X30"X67"

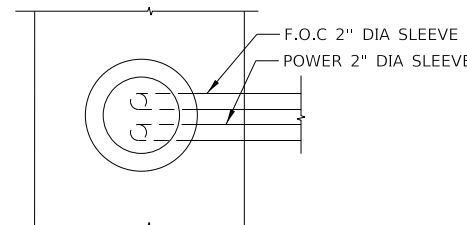

SECTION C-C
POWER AND F.O.C. WITHIN DMS FOUNDATION

NOTE TO DESIGNER

THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS NOT A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "CADD STANDARDS MANUAL" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.

DMS CABINET FOUNDATION NOTES:



- COORDINATE SIZE OF OPENING WITH DMS CONTROLLER CABINET BOTTOM CONDUIT CUT-OUTS
- CONCRETE = 4,000 PSI (MIN.)
- REBAR EPOXY COATED FY=60,000 PSI (MIN.)
- PROVIDE SHOP DRAWINGS PRIOR TO CONSTRUCTION
- INCLUDE CONDUITS



DMS CABINET LAYOUT
DETAIL

PLOT DRIVER: c:\mswcp-pb-us-pw-02\as_brad_hoder\0161165\pdf-1\Tollway.plt
PLOT DATE: 11/18/2025 11:08:39 AM
PLOT TIME: 3:01:39 AM
PLOT BY: bhodo
PLOT NAME: p:\mswcp-pb-us-pw-02\Documents\Illinois Tollway\GEG (997688)\Standard Drawings and Base Sheets\Base Sheets\Section - MV1100 ITS\MTS-1108.dgn

PLOT SCALE: 0:2.000000"=1'0" PAGE SIZE: 17x11 (in)

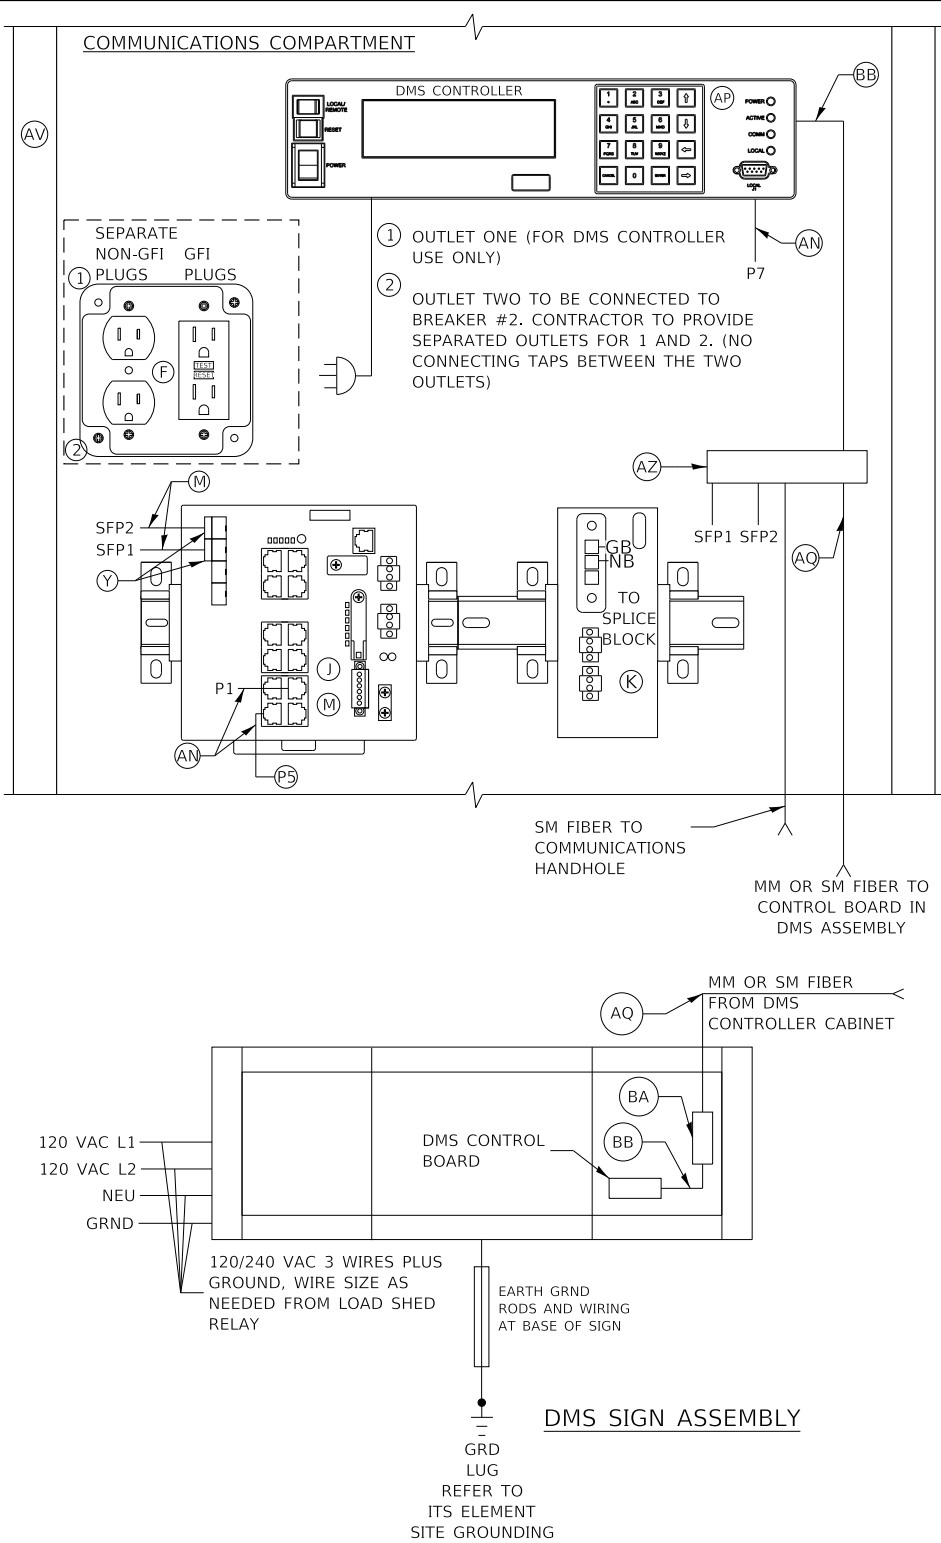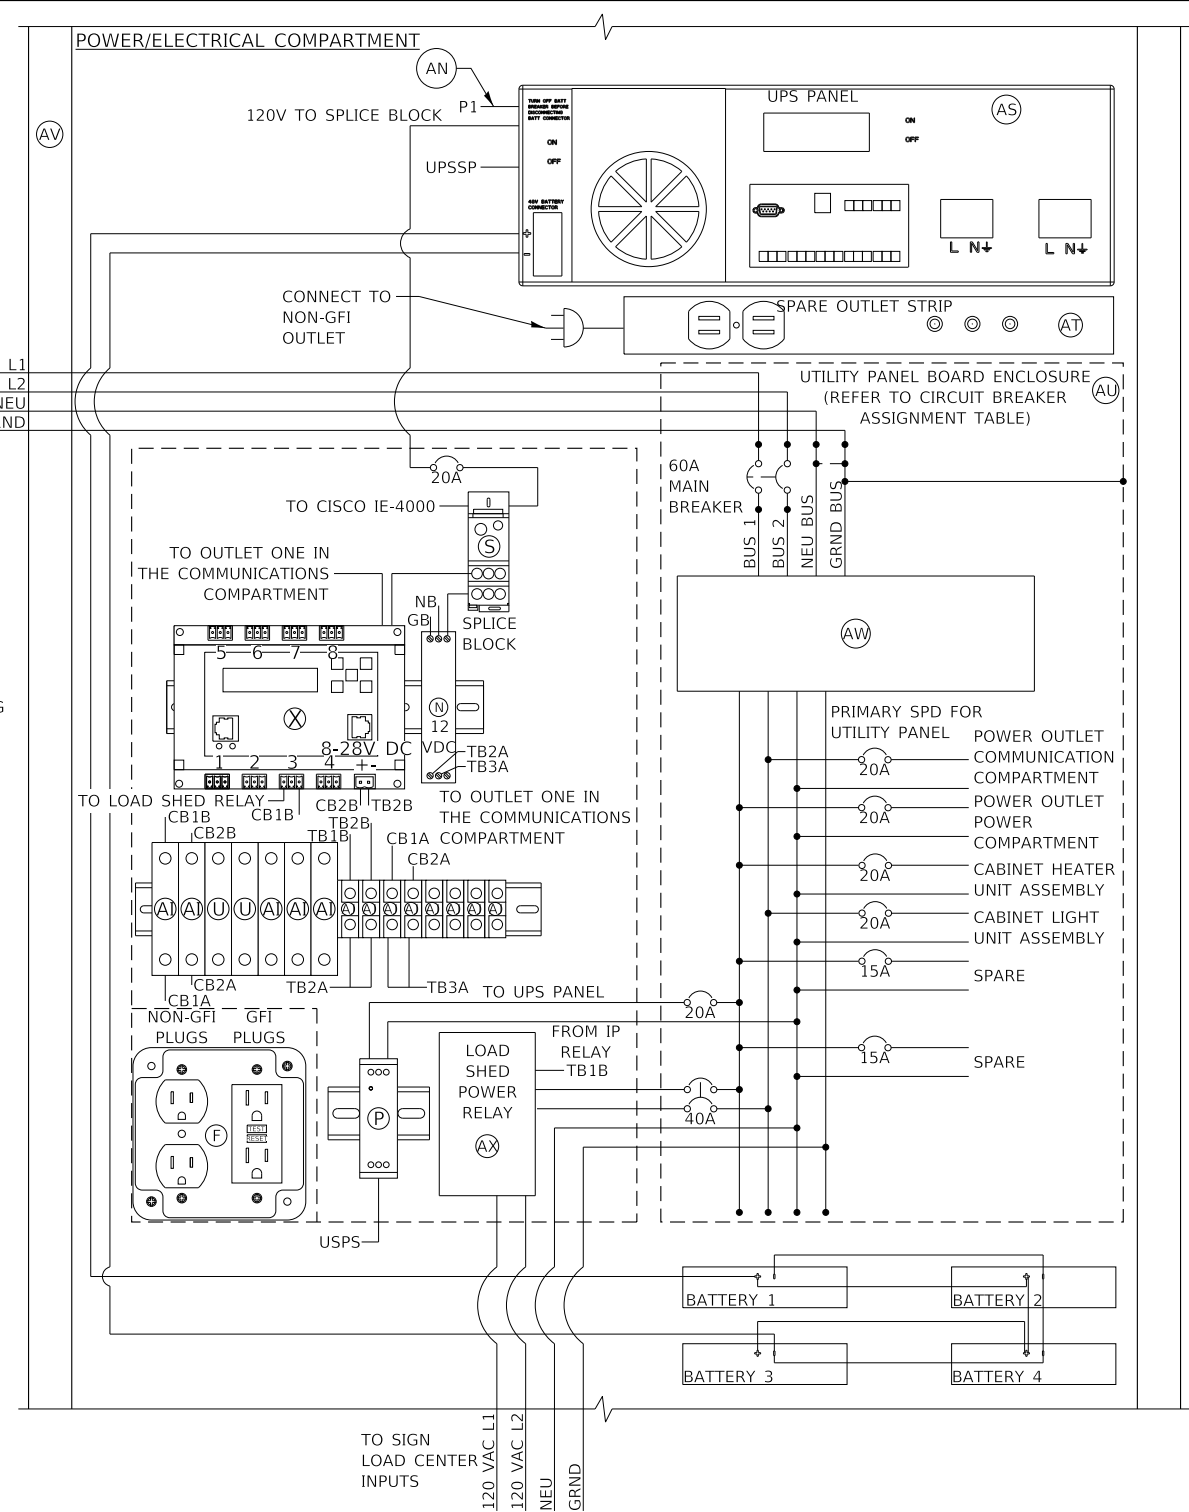

LEGEND:

ITEM	DESCRIPTION
A-E	NOT USED
F	TWO DUPLEX 120V RECEPTACLES, ONE GFCI (HUBBELL GFR5362TR) AND ONE STANDARD (HUBBELL BR20WR)
G-I	NOT USED
J	NETWORK SWITCH CISCO IE-4000-8T4G-E
K	CISCO POWER SUPPLY, PWR-IE170W-PC-AC=
L	IP SERVICES LICENSE: L-IE4000-RTU=
M	2 METER - SMFO LC-SC DUPLEX JUMPERS, CORNING/047202R5120002M
N	AC/DC POWER SUPPLY, 12VDC, 10 WATTS, MEAN WELL/MDR-10-12
O	SMF PATCH PANEL WITH SC CONNECTORS FIBER CONNECTIONS G620U012 LAN-100-0
P	120VAC SURGE SUPPRESSOR, MOUNTED ON DIN RAIL COOPER CROUSE HINDS/MA15/D/1/SI OR APPROVED EQUAL
Q-R	NOT USED
S	SPLICE BLOCK, ALTECH/38041
T	NOT USED
U	5A CIRCUIT BREAKER, ALLEN BRADLEY/1492-SPM1B050
V-W	NOT USED
X	POWER CONTROLLER, 8-CHANNEL DIN ETHERNET RELAY DIGITAL LOGGERS/DIN 4
Y	(2) GLC-LX-SM-RGD = 1 GBPS SM SFP MODULES
Z	NOT USED
AA-AH	NOT USED
AI	2A CIRCUIT BREAKER, ALLEN BRADLEY/1492-SPM1B020
AJ	TERMINAL BLOCK, ALLEN BRADLEY/1492-CD8
AK-AM	NOT USED
AN	INDOOR/OUTDOOR RATED CAT6 (1000MBS, TEMPERATURE HARDENED) THESE ARE THE CAT6 CABLES ROUTED INSIDE CABINET
AO	NOT USED
AP	DMS CONTROLLER
AQ	12-STRAND MULTI-MODE OR SINGLE-MODE FIBER OPTIC CABLE
AR	NOT USED
AS	UPS PANEL ALPHA TECHNOLOGIES FXM1100 WITH BATTERIES
AT	OUTLET STRIP
AU	DMS MANUFACTURER UTILITY PANEL ENCLOSURE
AV	DMS CONTROL CABINET TYPE 334 NEMA 4X
AW	120/240VAC MTL ZONE DEFENDER MODEL ZD16100
AX	LOAD SHED POWER RELAY MAGNECRAFT MODEL 199X-12 WITH COVER
AZ	RACK MOUNTED FIBER PATCH PANEL
BA	STAND ALONE FIBER PATCH PANEL
BB	2 METER FIBER JUMPER, CORNING (TYPE AND CONNECTION PER DMS MANUFACTURER)

NOTES:

- FABRICATOR TO PROVIDE CABINET DRAWINGS SUBMITTAL FOR REVIEW AND APPROVAL PRIOR TO FABRICATION.
- ENTIRE COMPLETED SYSTEM SHALL BE GROUNDING AND BONDED IN ACCORDANCE WITH MOTOROLA R56 MANUAL AND THE APPLICABLE ARTICLES OF SECTION 250 OF THE NATIONAL ELECTRICAL CODE.
- DMS CONTROLLER SHOWN REPRESENTS A GENERIC DMS CONTROLLER. DMS CONTROLLERS ARE SUPPLIED BY THE DMS MANUFACTURER AND THEREFORE THE FRONT PANEL MAY DIFFER.

NOTE TO DESIGNER

A CONTRACT SUBMITTAL CONTAINING THE FULL PROPOSED DMS CABINET LAYOUT AND ALL EQUIPMENT IS REQUIRED FOR ACCEPTANCE BY THE DESIGN ENGINEER.

NOTE TO DESIGNER

THIS BASE SHEET SHOWS TYPICAL CONSTRUCTION BUT IT IS **NOT** A STANDARD DRAWING. IT REQUIRES COMPLETION BY THE DESIGNER PRIOR TO INSERTION INTO A CONTRACT. MICROSTATION FILES AND THE "CADD STANDARDS MANUAL" ARE AVAILABLE ON THE ILLINOIS TOLLWAY WEBSITE. THE DESIGNER SHALL ACCEPT THE RESPONSIBILITY OF THE DESIGN OF THIS SHEET UPON ITS COMPLETION AND INSERTION INTO A CONTRACT. ALL "NOTE TO DESIGNER" BOXES SHALL BE REMOVED BY THE DESIGNER PRIOR TO INSERTION OF THE SHEET INTO THE PLAN SET.

CIRCUIT BREAKER ASSIGNMENT TABLE (SEE UTILITY PANEL BOARD CIRCUIT BREAKER LOCATIONS)			
MAIN		CIRCUIT BREAKER DESCRIPTION	CIRCUIT BREAKER LOCATION
1	2	POWER OUTLET POWER COMPARTMENT	20
3	4	CABINET HEATER UNIT ASSEMBLY	20
5	6	POWER OUTLET COMMUNICATION COMPARTMENT	20
7	8	CABINET LIGHT UNIT ASSEMBLY	15
		LOAD SHED RELAY	40
		UPS PANEL	20
		NOT USED	-

DMS CABINET WIRING DIAGRAM

VERSION: 2022-03	STANDARD: M-ITS-1108	SHEET: 1 OF 1
---------------------	-------------------------	------------------